THE ART OF MECHANICS

## SYMBOLS

Hydraulic vertical outreach [mt]

Hydraulic horizontal outreach [mt]

Rotation angle [°]

Working pressure [Bar]

Recommended oil flow [l/min]

Crane weight without oil in tank [Kg]

Max width [mm]

Installation width [mm]

Max height [mm]

Crane N extensions

## INDEX


| Crane Model | Pg |
|---|---|
| M 1.1, M 1.4, M 1.9, M 2.2, M 2.7, M 3.3, M 3.8, M 4.3 | 5 |
| 3.0 | 20 |
| 3.0 COMPACT | 22 |
| 3.0 SUPERLEGGERA | 24 |
| 3.6 | 26 |
| 4.0 | 28 |
| 4.0 X | 30 |
| 4.0 SUPERCOMPACT | 32 |
| 4.0 FLY JIB | 34 |
| 5.0 | 36 |
| 5.0 COMPACT | 38 |
| 5.0 FLY JIB | 40 |
| 6.0 | 42 |
| 6.0 COMPACT | 44 |
| 6.0 RECYCLING | 46 |
| 6.0 FLY JIB | 47 |
| 7.0 COMPACT | 48 |
| 7.0 FLY JIB | 50 |
| 7.7 | 51 |
| 7.7 FLY JIB | 52 |
| 8.7 | 54 |
| 8.7 FLY JIB | 56 |
| 9.0 T BOOM | 58 |
| 9.7 | 60 |
| 9.7 FLY JIB | 62 |
| 12.0 | 64 |
| 12.0 FLY JIB | 66 |
| 12.0 T BOOM | 68 |
| 13.0 | 70 |
| 13.0 FLY JIB | 72 |
| 15.0 | 74 |
| 15.0 FLY JIB | 77 |
| 17.0 | 78 |
| 17.0 RECYCLING | 80 |
| 17.0 FLY JIB | 82 |
| 19.0 | 84 |
| 19.0 FLY JIB | 86 |
| 22.0 | 88 |
| 22.0 FLY JIB | 90 |
| 24.0 | 92 |
| 24.0 FLY JIB | 94 |
| 27.00 | 96 |
| 30.00 | 98 |
| 33.0 | 100 |
| 33.0 FLY JIB | 102 |
| 37.0 | 104 |
| 37.0 FLY JIB | 106 |
| 44.0 | 108 |
| 44.0 FLY JIB | 110 |
| **Additional** | |
| MOBILE ELEVATING WORK PLATFORM – X 1P | 114 |
| MOBILE ELEVATING WORK PLATFORM – X 2P | 116 |
| **Additional Stabilizers** | |
| STABILIZERS | 118 |

**M 1.1 S1**




**M 1.1 S2**

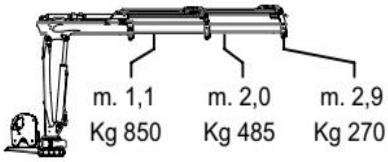


**M 1.1 S3**

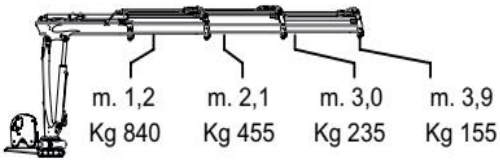


**M 1.1 S4**

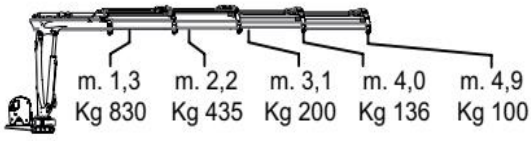


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| M 1.1 S1 | 3,2 | 1,9 | 360 | 220 | 7 | 210 | 1145 | 510 | 1485 |
| M 1.1 S2 | 4,1 | 2,9 | 360 | 220 | 7 | 232 | 1145 | 510 | 1485 |
| M 1.1 S3 | 5,0 | 3,9 | 360 | 220 | 7 | 255 | 1145 | 510 | 1485 |
| M 1.1 S4 | 5,9 | 4,9 | 360 | 220 | 7 | 260 | 1145 | 510 | 1485 |

EXCLUSIVELY
MADE IN ITALY

## Model M 1.4



### M 1.4 S1




### M 1.4 S2

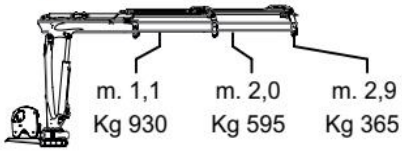


### M 1.4 S3

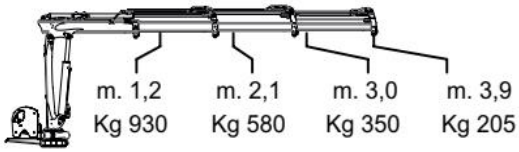


### M 1.4 S4

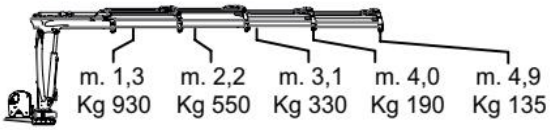


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| M 1.4 S1 | 3,2 | 1,9 | 360 | 220 | 7 | 212 | 1145 | 510 | 1485 |
| M 1.4 S2 | 4,1 | 2,9 | 360 | 220 | 7 | 234 | 1145 | 510 | 1485 |
| M 1.4 S3 | 5,0 | 3,9 | 360 | 220 | 7 | 257 | 1145 | 510 | 1485 |
| M 1.4 S4 | 5,9 | 4,9 | 360 | 220 | 7 | 272 | 1145 | 510 | 1485 |

EXCLUSIVELY
MADE IN ITALY

## M 1.9 S1




## M 1.9 S2

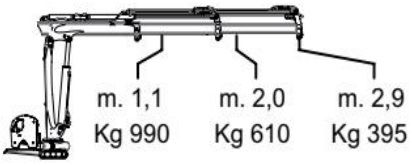


## M 1.9 S3

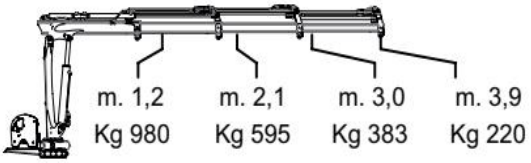


## M 1.9 S4

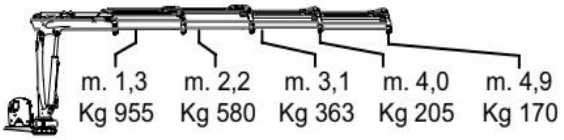


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| M 1.9 S1 | 3,2 | 1,9 | 360 | 220 | 7 | 216 | 1145 | 510 | 1485 |
| M 1.9 S2 | 4,1 | 2,9 | 360 | 220 | 7 | 242 | 1145 | 510 | 1485 |
| M 1.9 S3 | 5,0 | 3,9 | 360 | 220 | 7 | 265 | 1145 | 510 | 1485 |
| M 1.9 S4 | 5,9 | 4,9 | 360 | 220 | 7 | 280 | 1145 | 510 | 1485 |

EXCLUSIVELY
MADE IN ITALY

## Model M 2.2



### M 2.2 S1




### M 2.2 S2

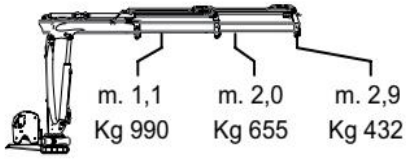


### M 2.2 S3

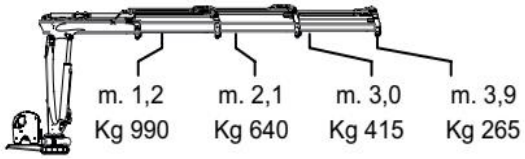


### M 2.2 S4

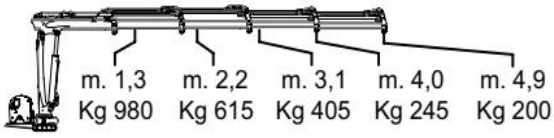


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| M 2.2 S1 | 3,2 | 1,9 | 360 | 220 | 8 | 220 | 1145 | 510 | 1485 |
| M 2.2 S2 | 4,1 | 2,9 | 360 | 220 | 8 | 248 | 1145 | 510 | 1485 |
| M 2.2 S3 | 5,0 | 3,9 | 360 | 220 | 8 | 270 | 1145 | 510 | 1485 |
| M 2.2 S4 | 5,9 | 4,9 | 360 | 220 | 8 | 285 | 1145 | 510 | 1485 |

EXCLUSIVELY
MADE IN ITALY

## M 2.7 S1




## M 2.7 S2

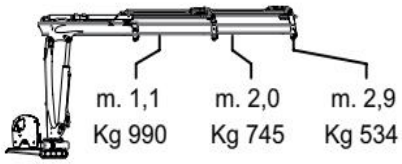


## M 2.7 S3

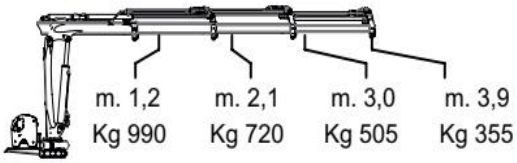


## M 2.7 S4

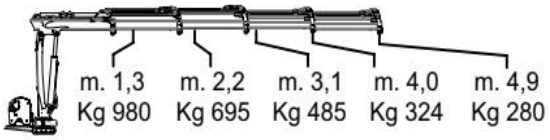


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| M 2.7 S1 | 3,5 | 1,9 | 360 | 220 | 10 | 286 | 1310 | 480 | 1640 |
| M 2.7 S2 | 4,4 | 2,9 | 360 | 220 | 10 | 312 | 1310 | 480 | 1640 |
| M 2.7 S3 | 5,3 | 3,9 | 360 | 220 | 10 | 335 | 1310 | 480 | 1640 |
| M 2.7 S4 | 6,2 | 4,9 | 360 | 220 | 10 | 350 | 1310 | 480 | 1640 |

EXCLUSIVELY
MADE IN ITALY

## Model M 3.3



### M 3.3 S1




### M 3.3 S2

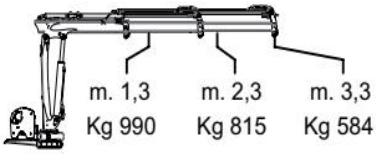


### M 3.3 S3

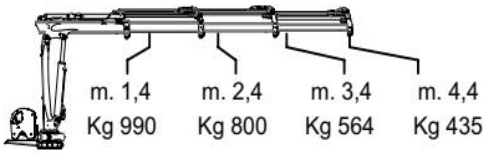


### M 3.3 S4

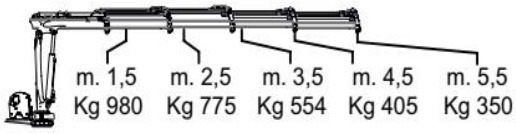


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| M 3.3 S1 | 3,6 | 1,9 | 360 | 220 | 12 | 349 | 1345 | 480 | 1677 |
| M 3.3 S2 | 4,5 | 2,9 | 360 | 220 | 12 | 386 | 1345 | 480 | 1677 |
| M 3.3 S3 | 5,4 | 3,9 | 360 | 220 | 12 | 420 | 1345 | 480 | 1677 |
| M 3.3 S4 | 6,3 | 4,9 | 360 | 220 | 12 | 445 | 1345 | 480 | 1677 |

EXCLUSIVELY
MADE IN ITALY

**M 3.8 S1**




**M 3.8 S2**

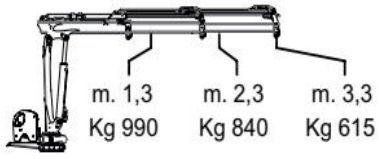


**M 3.8 S3**

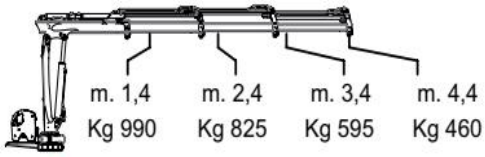


**M 3.8 S4**

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| M 3.8 S1 | 3,6 | 1,9 | 360 | 220 | 13 | 355 | 1345 | 480 | 1677 |
| M 3.8 S2 | 4,5 | 2,9 | 360 | 220 | 13 | 392 | 1345 | 480 | 1677 |
| M 3.8 S3 | 5,4 | 3,9 | 360 | 220 | 13 | 426 | 1345 | 480 | 1677 |
| M 3.8 S4 | 6,3 | 4,9 | 360 | 220 | 13 | 451 | 1345 | 480 | 1677 |

EXCLUSIVELY
MADE IN ITALY

## M 4.3 S1




## M 4.3 S2

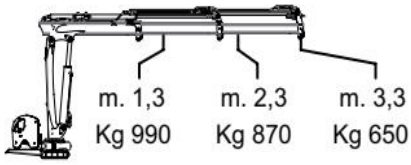


## M 4.3 S3

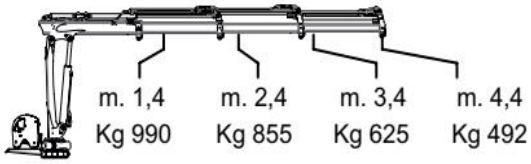


## M 4.3 S4

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| M 4.3 S1 | 3,6 | 1,9 | 360 | 220 | 13 | 360 | 1345 | 480 | 1677 |
| M 4.3 S2 | 4,5 | 2,9 | 360 | 220 | 13 | 397 | 1345 | 480 | 1677 |
| M 4.3 S3 | 5,4 | 3,9 | 360 | 220 | 13 | 431 | 1345 | 480 | 1677 |
| M 4.3 S4 | 6,3 | 4,9 | 360 | 220 | 13 | 456 | 1345 | 480 | 1677 |

EXCLUSIVELY
MADE IN ITALY

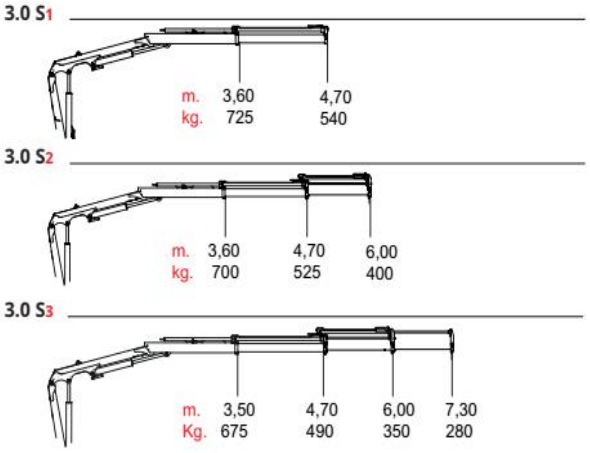


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 3.0 S1 | 7,30 | 4,70 | 365 | 270 | 10 | 395 | 1870 | 450 | 1570 |
| 3.0 S2 | 8,80 | 6,00 | 365 | 270 | 10 | 415 | 1870 | 450 | 1570 |
| 3.0 S3 | 9,70 | 7,30 | 365 | 270 | 10 | 435 | 1870 | 450 | 1570 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

## COMPACT

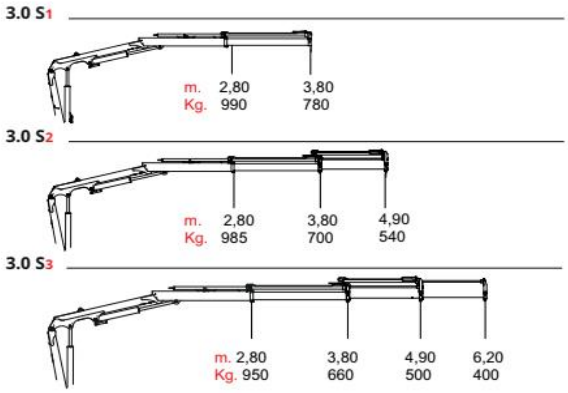


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 3.0 S1 | 5,80 | 3,80 | 365 | 270 | 10 | 390 | 1690 | 450 | 1610 |
| 3.0 S2 | 6,90 | 4,90 | 365 | 270 | 10 | 410 | 1690 | 450 | 1610 |
| 3.0 S3 | 8,20 | 6,20 | 365 | 270 | 10 | 430 | 1690 | 450 | 1610 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY MADE IN ITALY

**3.6 S1**

**3.6 S2**

**3.6 S3**




| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 3.6 S1 | 7,30 | 4,90 | 365 | 280 | 12 | 410 | 1870 | 460 | 1570 |
| 3.6 S2 | 8,80 | 5,95 | 365 | 280 | 12 | 425 | 1870 | 460 | 1570 |
| 3.6 S3 | 9,70 | 7,30 | 365 | 280 | 12 | 450 | 1870 | 460 | 1570 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 4.0 S1 | 7,20 | 4,50 | 365 | 255 | 10 | 470 | 1690 | 550 | 1581 |
| 4.0 S2 | 8,40 | 5,80 | 365 | 255 | 10 | 500 | 1690 | 550 | 1581 |
| 4.0 S3 | 9,90 | 7,20 | 365 | 255 | 10 | 530 | 1690 | 550 | 1581 |
| 4.0 S1 | 11,10 | 8,60 | 365 | 255 | 10 | 560 | 1690 | 550 | 1581 |



**4.0 S1**

| m. | 3,60 | 4,50 |
|---|---|---|
| Kg. | 995 | 780 |

**4.0 S2**

| m. | 3,45 | 4,50 | 5,80 |
|---|---|---|---|
| Kg. | 990 | 730 | 560 |

**4.0 S3**

| m. | 3,40 | 4,50 | 5,80 | 7,20 |
|---|---|---|---|---|
| Kg. | 990 | 715 | 550 | 420 |

**4.0 S4**

| m. | 3,40 | 4,70 | 6,00 | 7,30 | 8,60 |
|---|---|---|---|---|---|
| Kg. | 980 | 710 | 540 | 400 | 330 |

## SUPERCOMPACT

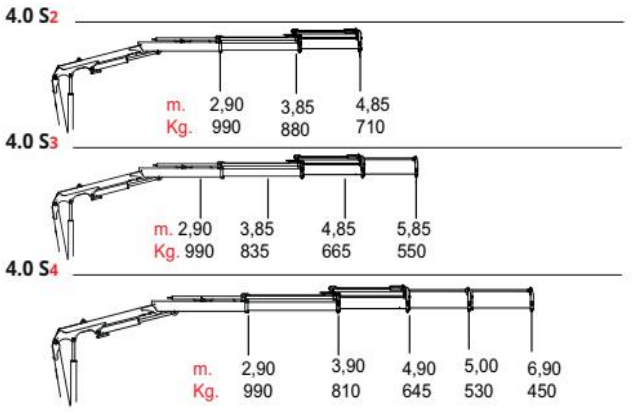


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 4.0 S2 | 7,45 | 4,85 | 365 | 280 | 10 | 470 | 1577 | 544 | 1577 |
| 4.0 S3 | 8,45 | 5,85 | 365 | 280 | 10 | 500 | 1577 | 544 | 1577 |
| 4.0 S4 | 9,60 | 6,90 | 365 | 280 | 10 | 530 | 1628 | 544 | 1628 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

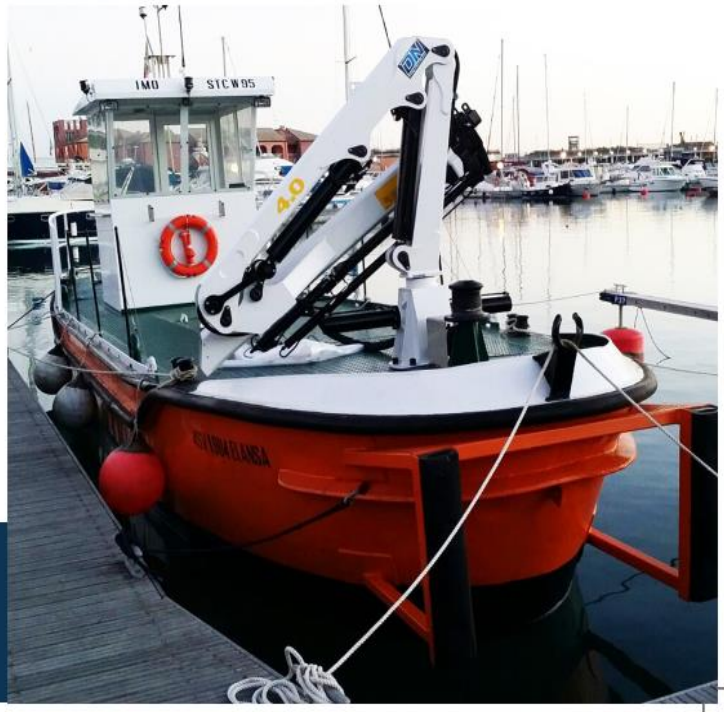


EXCLUSIVELY
MADE IN ITALY

## FLY JIB

**4.0 S2 J1**




**4.0 S2 J2**




**4.0 S3 J1**

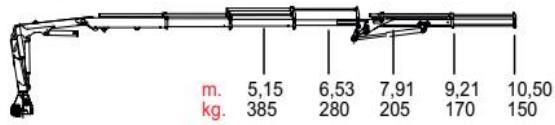


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 4.0 S2 J1 | 11,80 | 9,40 | 365 | 265 | 10 | 630 | 1900 | 550 | 1730 |
| 4.0 S2 J2 | 12,85 | 10,40 | 365 | 265 | 10 | 670 | 1900 | 550 | 1730 |
| 4.0 S3 J1 | 13,10 | 10,50 | 365 | 265 | 10 | 660 | 1900 | 550 | 1730 |

**Standard**
- Flanged valves for more safety
- Two sides levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY MADE IN ITALY

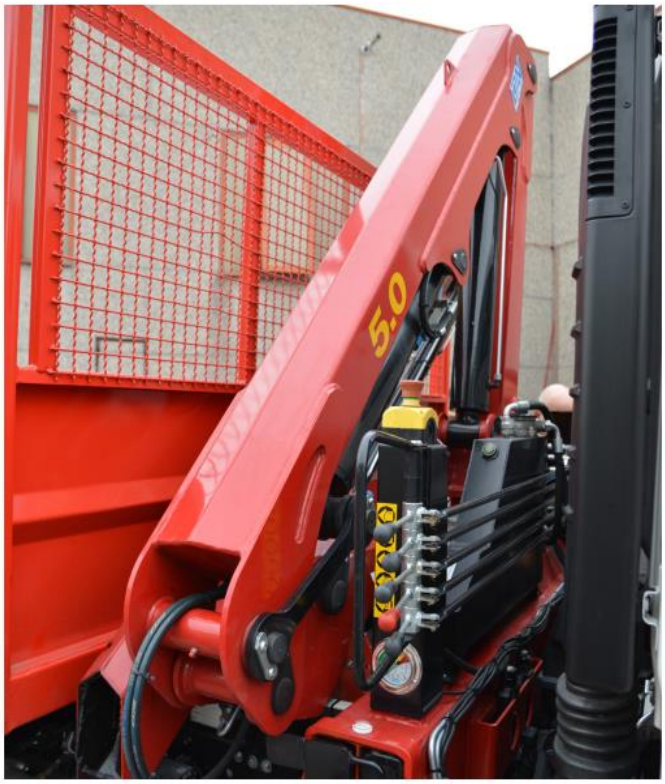


**5.0 S2**

| m. | 3,90 | 5,50 | 7,10 |
|---|---|---|---|
| Kg. | 1190 | 830 | 600 |

**5.0 S3**

| m. | 3,90 | 5,50 | 7,10 | 8,40 |
|---|---|---|---|---|
| Kg. | 1120 | 800 | 580 | 440 |

**5.0 S4**

| m. | 3,90 | 5,50 | 7,10 | 8,40 | 9,70 |
|---|---|---|---|---|---|
| Kg. | 1080 | 770 | 550 | 410 | 300 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 5.0 S2 | 9,55 | 7,10 | 365 | 265 | 15 | 665 | 2100 | 660 | 1800 |
| 5.0 S3 | 10,85 | 8,40 | 365 | 265 | 15 | 700 | 2100 | 660 | 1800 |
| 5.0 S4 | 12,15 | 9,70 | 365 | 265 | 15 | 740 | 2100 | 660 | 1800 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

## COMPACT

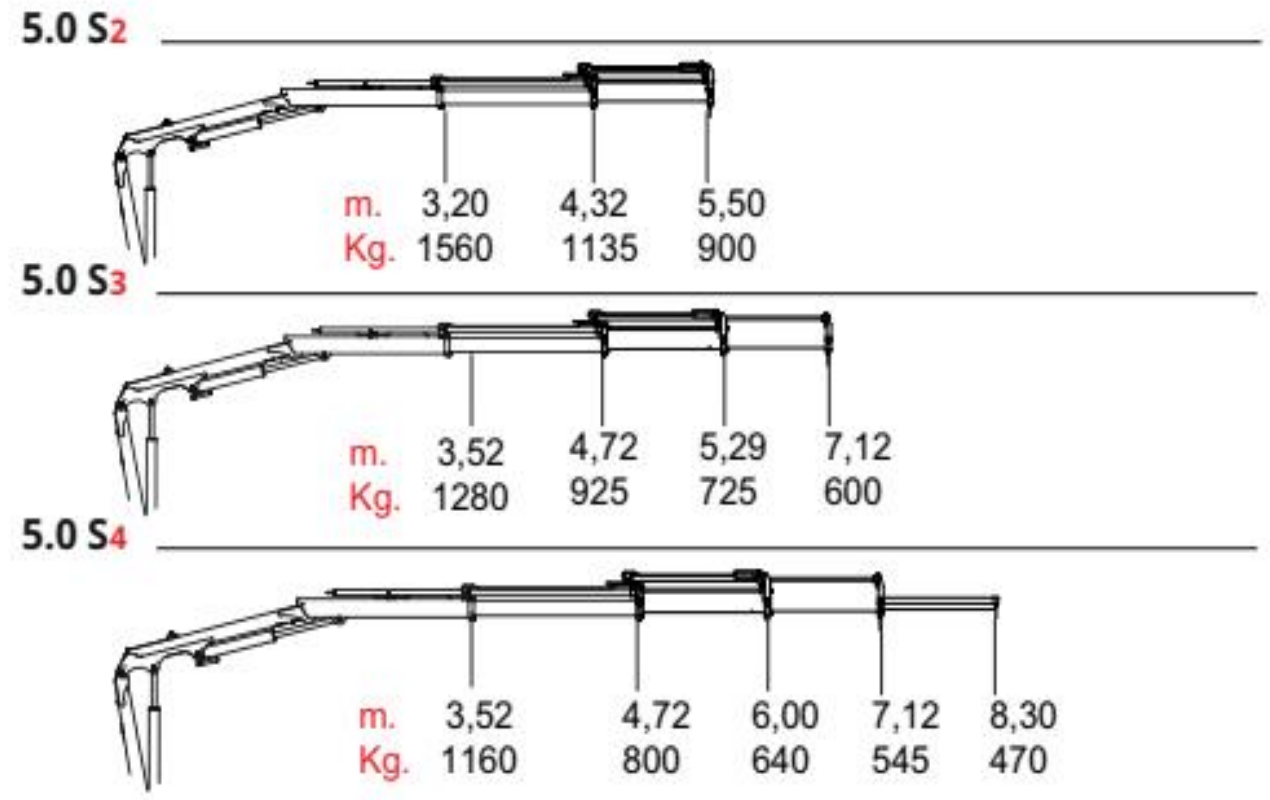


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 5.0 S2 | 8,40 | 5,50 | 365 | 250 | 15 | 605 | 1700 | 581 | 1800 |
| 5.0 S3 | 9,92 | 7,12 | 365 | 250 | 15 | 605 | 1700 | 581 | 1800 |
| 5.0 S4 | 11,10 | 8,30 | 365 | 250 | 15 | 605 | 1700 | 581 | 1800 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

## FLY JIB

**5.0 S2 J2**

**5.0 S3 J1**

**5.0 S3 J2**

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 5.0 S2 J2 | 14,45 | 11,35 | 365 | 280 | 15 | 852 | 2100 | 660 | 1800 |
| 5.0 S3 J1 | 14,85 | 11,75 | 365 | 280 | 15 | 860 | 2100 | 660 | 1800 |
| 5.0 S3 J2 | 16,22 | 13,12 | 365 | 280 | 15 | 890 | 2100 | 660 | 1800 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY MADE IN ITALY

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

**EXCLUSIVELY MADE IN ITALY**

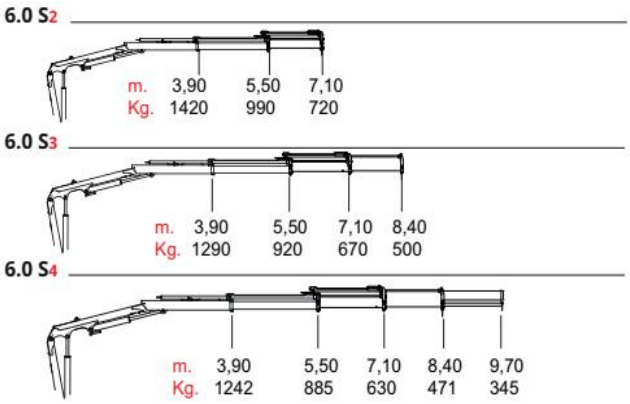


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 6.0 S2 | 9,55 | 7,10 | 365 | 285 | 15 | 715 | 2100 | 660 | 1800 |
| 6.0 S3 | 10,85 | 8,40 | 365 | 285 | 15 | 750 | 2100 | 660 | 1800 |
| 6.0 S4 | 12,15 | 9,70 | 365 | 285 | 15 | 790 | 2100 | 660 | 1800 |

## *COMPACT*

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

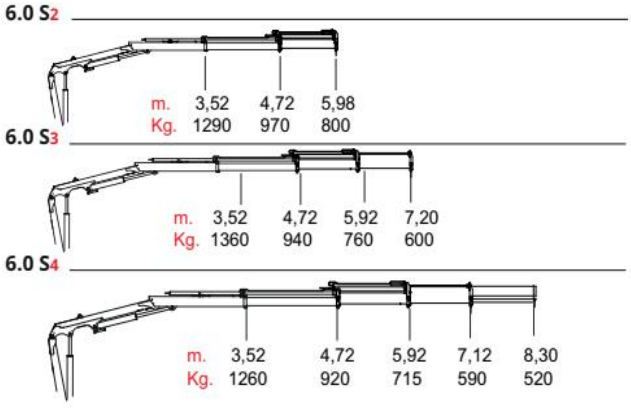


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 6.0 S2 | 8,88 | 5,98 | 365 | 260 | 15 | 605 | 1700 | 581 | 1800 |
| 6.0 S3 | 9,90 | 7,20 | 365 | 260 | 15 | 650 | 1700 | 581 | 1800 |
| 6.0 S4 | 11,10 | 8,30 | 365 | 260 | 15 | 690 | 1700 | 581 | 1800 |

## RECYCLING

### 6.0 S3




FIG 1

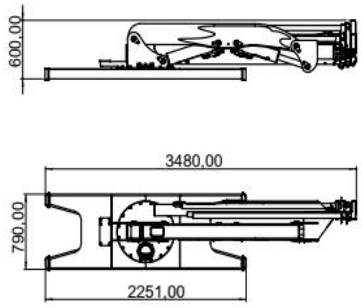


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 6.0 S3 R | 7,00 | 7,03 | 360 | 270 | 15 | 750 | Fig.1 | Fig.1 | Fig.1 |



## FLY JIB

### 6.0 S2 J2

### 6.0 S3 J2

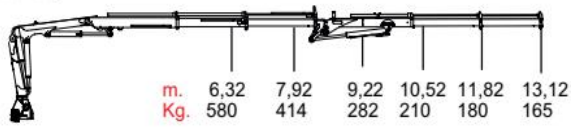


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 6.0 S2 J2 | 14,45 | 11,35 | 365 | 265 | 15 | 852 | 2100 | 660 | 1800 |
| 6.0 S3 J2 | 16,22 | 13,12 | 365 | 265 | 18 | 890 | 2100 | 660 | 1800 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch

EXCLUSIVELY
MADE IN ITALY

## COMPACT

**7.0 S3**




**7.0 S4**




| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 7.0 S3 | 9,90 | 7,20 | 365 | 270 | 15 | 650 | 1700 | 581 | 1800 |
| 7.0 S4 | 11,10 | 8,30 | 365 | 270 | 15 | 690 | 1700 | 581 | 1800 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

## FLY JIB

**7.7 S2**



| m. | 2,55 | 3,97 | 5,57 | 7,17 |
|---|---|---|---|---|
| Kg. | 2280 | 1590 | 1000 | 850 |

**7.7 S3**



| m. | 2,52 | 3,88 | 5,84 | 7,08 | 8,68 |
|---|---|---|---|---|---|
| Kg. | 2284 | 1523 | 1047 | 795 | 644 |

**7.7 S4**



| m. | 2,52 | 3,95 | 5,55 | 7,14 | 8,74 | 10,4 |
|---|---|---|---|---|---|---|
| Kg. | 2240 | 1467 | 996 | 750 | 599 | 504 |

**7.0 S3 J2**

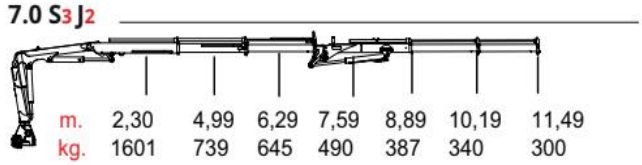

| m. | 2,30 | 4,99 | 6,29 | 7,59 | 8,89 | 10,19 | 11,49 |
|---|---|---|---|---|---|---|---|
| kg. | 1601 | 739 | 645 | 490 | 387 | 340 | 300 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 7.0 S3 J2 | 14,90 | 11,49 | 365 | 280 | 18 | 820 | 1700 | 660 | 1800 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 7.7 S2 | 10,20 | 7,10 | 395 | 270 | 18 | 840 | 2280 | 670 | 1900 |
| 7.7 S3 | 12,00 | 8,68 | 395 | 270 | 18 | 890 | 2280 | 670 | 1900 |
| 7.7 S4 | 13,50 | 10,40 | 395 | 270 | 18 | 940 | 2280 | 670 | 1900 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY MADE IN ITALY

## FLY JIB

### 7.7 S2 J2

### 7.7 S3 J1

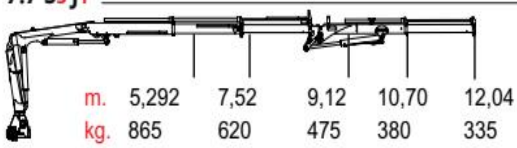


### 7.7 S3 J2

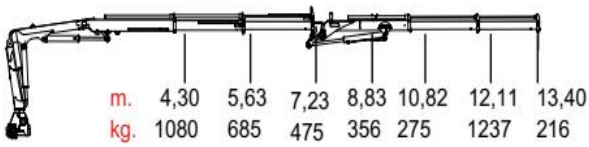


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 7.7 S2 J2 | 15,00 | 11,80 | 365 | 280 | 20 | 1030 | 2280 | 670 | 2130 |
| 7.7 S3 J1 | 15,24 | 12,04 | 365 | 280 | 20 | 1050 | 2280 | 670 | 2130 |
| 7.7 S3 J2 | 16,60 | 13,40 | 365 | 280 | 20 | 1080 | 2280 | 670 | 2130 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY MADE IN ITALY

**8.7 S2**

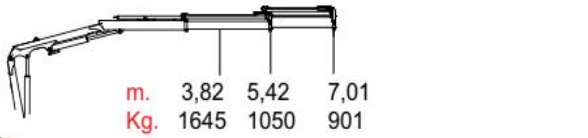


**8.7 S3**

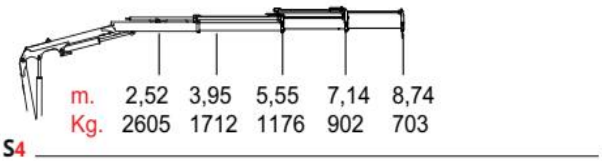


**8.7 S4**

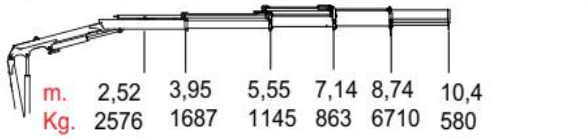


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 8.7 S2 | 10,20 | 7,10 | 395 | 270 | 18 | 870 | 2280 | 670 | 1900 |
| 8.7 S3 | 11,90 | 8,74 | 395 | 270 | 18 | 920 | 2280 | 670 | 1900 |
| 8.7 S4 | 13,50 | 10,40 | 395 | 270 | 18 | 970 | 2280 | 670 | 1900 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY MADE IN ITALY

## FLY JIB

### 8.7 S3 J2

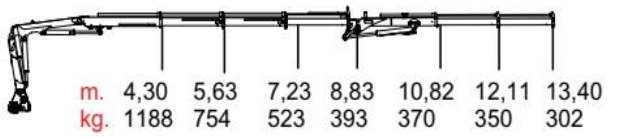


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 8.7 S3 J2 | 16,60 | 13,40 | 365 | 280 | 20 | 1150 | 2280 | 670 | 2130 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY MADE IN ITALY

## T -BOOM

**9.0 TB S2**




**9.0 TB S3**

**9.0 TB S4**




| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 9.0 TB S2 | 8,30 | 5,14 | 365 | 270 | 20 | 760 | 2280 | 573 | 2174 |
| 9.0 TB S3 | 9,95 | 6,61 | 365 | 270 | 20 | 840 | 2280 | 545 | 2174 |
| 9.0 TB S4 | 11,60 | 8,30 | 365 | 270 | 20 | 900 | 2280 | 560 | 2174 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 60 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch

EXCLUSIVELY
MADE IN ITALY

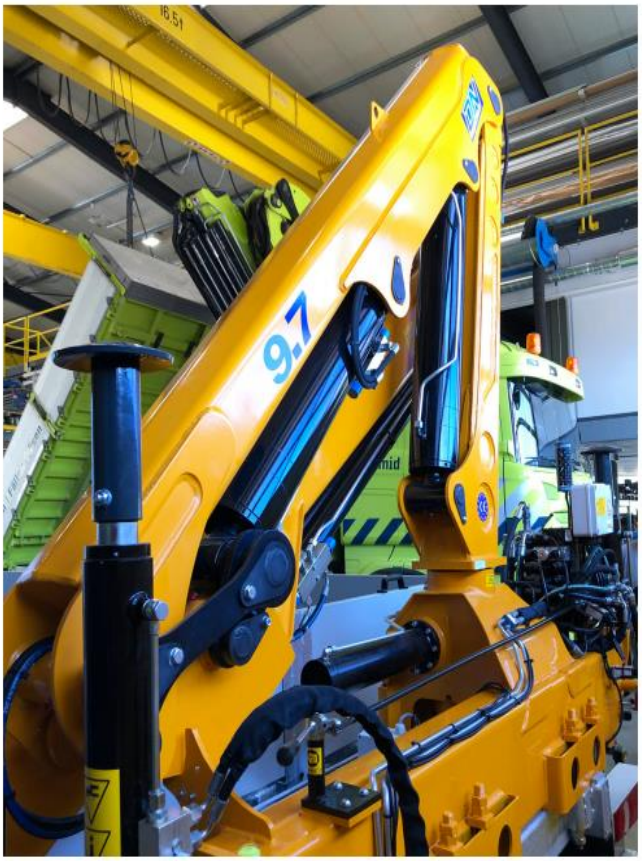


**9.7 S2**

| | | | | |
|---|---|---|---|---|
| m. | 2,55 | 3,86 | 5,46 | 7,06 |
| Kg. | 3420 | 2260 | 1600 | 1240 |

**9.7 S3**

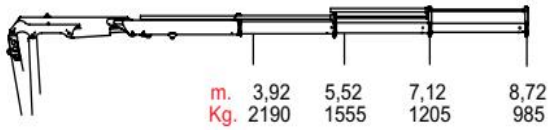

| | | | | |
|---|---|---|---|---|
| m. | 3,92 | 5,52 | 7,12 | 8,72 |
| Kg. | 2190 | 1555 | 1205 | 985 |

**9.7 S4**

| | | | | | | |
|---|---|---|---|---|---|---|
| m. | 2.55 | 3,98 | 5,58 | 7,18 | 8,78 | 10,38 |
| Kg. | 3230 | 2070 | 1475 | 1145 | 935 | 790 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 9.7 S2 | 10,20 | 7,10 | 365 | 285 | 20 | 900 | 2280 | 670 | 1930 |
| 9.7 S3 | 11,90 | 8,74 | 365 | 285 | 20 | 950 | 2280 | 670 | 1930 |
| 9.7 S4 | 13,50 | 10,40 | 365 | 285 | 20 | 1000 | 2280 | 670 | 1930 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

## FLY JIB

**9.7 S2 J2**

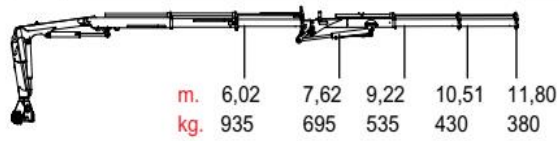


**9.7 S3 J2**

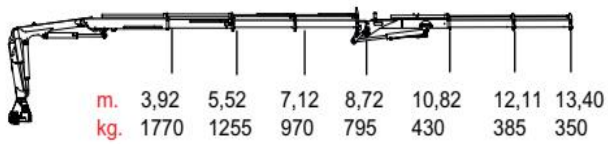


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 9.7 S2 J2 | 15,00 | 11,80 | 365 | 295 | 22 | 1030 | 2280 | 670 | 2130 |
| 9.7 S3 J2 | 16,60 | 13,40 | 365 | 285 | 22 | 1100 | 2280 | 670 | 2130 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY MADE IN ITALY

**12.0 S2**




**12.0 S3**




**12.0 S4**




| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 12.0 S2 | 11,10 | 7,80 | 365 | 285 | 25 | 1400 | 2400 | 790 | 1930 |
| 12.0 S3 | 12,90 | 9,80 | 365 | 285 | 25 | 1485 | 2400 | 790 | 1930 |
| 12.0 S4 | 15,20 | 11,70 | 365 | 285 | 25 | 1550 | 2400 | 790 | 1930 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

## FLY JIB

**12.0 S3 J2**

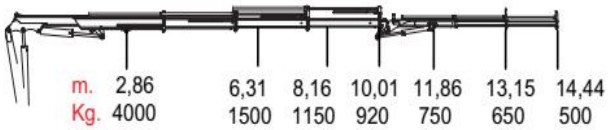


**12.0 S4 J2**




| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 12.0 S3 J2 | 17,80 | 14,44 | 365 | 285 | 25 | 1600 | 2420 | 790 | 2200 |
| 12.0 S4 J2 | 19,60 | 16,29 | 365 | 285 | 25 | 1800 | 2444 | 790 | 2200 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

## T - BOOM

**12.0 TB S2**



| | | | |
|---|---|---|---|
| m. | 2,85 | 4,10 | 5,95 |
| Kg. | 4400 | 3000 | 2015 |

**12.0 TB S3**



| | | | | |
|---|---|---|---|---|
| m. | 2,24 | 4,08 | 5,94 | 7,80 |
| Kg. | 5380 | 2950 | 1920 | 1500 |

**12.0 TB S4**



| | | | | | |
|---|---|---|---|---|---|
| m. | 2.24 | 4,10 | 5,94 | 7,80 | 9,70 |
| Kg. | 5300 | 2900 | 1850 | 1420 | 1142 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 12.0 TB S2 | 9,30 | 5,90 | 365 | 280 | 25 | 1300 | 2350 | 700 | 2330 |
| 12.0 TB S3 | 10,40 | 7,80 | 365 | 280 | 25 | 1420 | 2400 | 730 | 2430 |
| 12.0 TB S4 | 11,80 | 9,70 | 365 | 280 | 25 | 1500 | 2450 | 760 | 2500 |

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 60 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch

EXCLUSIVELY MADE IN ITALY
EXCLUSIVELY MADE IN ITALY

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

**13.0 S2**

**13.0 S3**




**13.0 S4**




**13.0 S5**

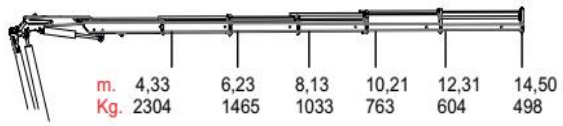


**13.0 S6**

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 13.0 S2 | 11,10 | 7,96 | 410 | 250 | 30 | 1640 | 2389 | 885 | 2160 |
| 13.0 S3 | 13,20 | 10,05 | 410 | 250 | 30 | 1680 | 2389 | 885 | 2160 |
| 13.0 S4 | 15,60 | 12,22 | 410 | 250 | 30 | 1780 | 2400 | 885 | 2160 |
| 13.0 S5 | 17,85 | 14,50 | 410 | 250 | 30 | 1856 | 2430 | 885 | 2160 |
| 13.0 S6 | 20,10 | 16,79 | 410 | 250 | 30 | 1926 | 2450 | 885 | 2160 |

## *FLY JIB*



**13.0 S4 J2**



| | m. | 6,30 | 8,20 | 10,29 | 12,19 | 15,63 | 16,94 |
|---|---|---|---|---|---|---|---|
| | Kg. | 1721 | 1215 | 895 | 500 | 390 | 360 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **13.0 S4 J2** | 19,50 | 16,94 | 410 | 295 | 30 | 2050 | 2450 | 885 | 2460 |

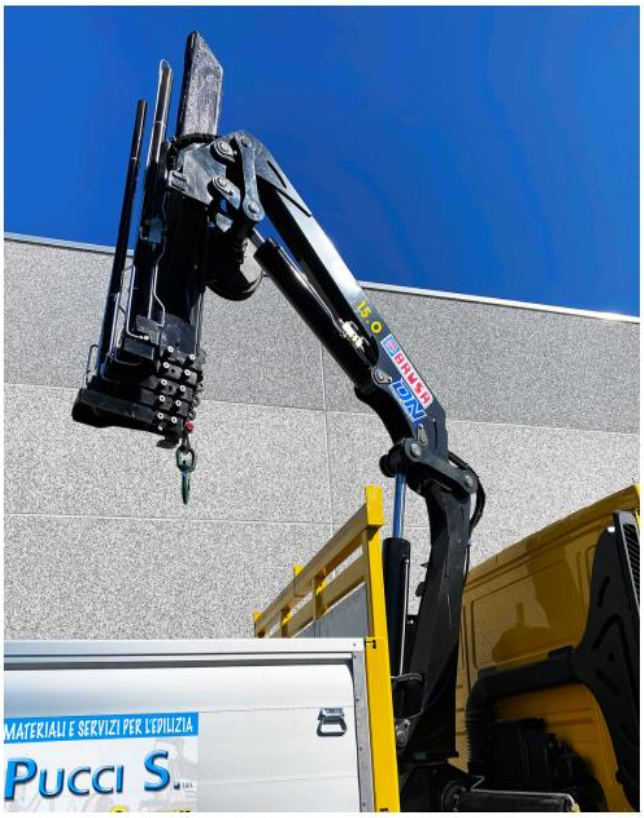


**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

EXCLUSIVELY
MADE IN ITALY

**15.0 S2**




**15.0 S3**




**15.0 S4**




**15.0 S5**

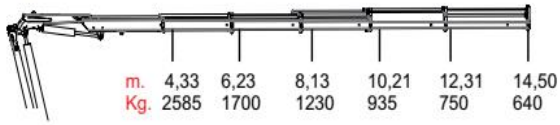


**15.0 S6**

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 15.0 S2 | 11,40 | 7,88 | 410 | 290 | 30 | 1750 | 2389 | 885 | 2160 |
| 15.0 S3 | 13,50 | 10,00 | 410 | 290 | 30 | 1878 | 2389 | 885 | 2160 |
| 15.0 S4 | 15,60 | 12,22 | 410 | 290 | 30 | 1940 | 2400 | 885 | 2160 |
| 15.0 S5 | 17,85 | 14,50 | 410 | 290 | 30 | 2000 | 2430 | 885 | 2160 |
| 15.0 S6 | 20,10 | 16,79 | 410 | 290 | 30 | 2060 | 2450 | 885 | 2160 |

## FLY JIB

**Standard**
- Flanged valves for more safety
- Two side levers
- Iron made oil tank capacity 30 liters

**Optional**
- Tilting Stabilizers 180°
- 2 extra functions for grab and rotator
- Scanreco remote control
- Hawe proportional valve bank
- Winch
- Mobile elevating work platform

**15.4 S4 J2**




| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 15.0 S3 J1 | 17,10 | 14,04 | 410 | 290 | 30 | 1980 | 2450 | 885 | 2460 |
| 15.0 S4 J2 | 19,51 | 16,95 | 410 | 290 | 30 | 2100 | 2450 | 885 | 2460 |

## Standard

- Up to 6 hydraulic extensions in the main boom, Superpower fly jib up to 4 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

## Optionals

- Winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

**17.0 S2**



| | | | | | |
|---|---|---|---|---|---|
| m. | 2,73 | 4,08 | 5,98 | 7,88 |
| Kg. | 5615 | 3700 | 2555 | 1960 |

**17.0 S3**



| | | | | | |
|---|---|---|---|---|---|
| m. | 2,73 | 4,16 | 6,06 | 7,96 | 10,05 |
| Kg. | 5340 | 3512 | 2385 | 1796 | 1419 |

**17.0 S4**

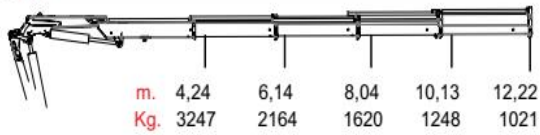

| | | | | | |
|---|---|---|---|---|---|
| m. | 4,24 | 6,14 | 8,04 | 10,13 | 12,22 |
| Kg. | 3247 | 2164 | 1620 | 1248 | 1021 |

**17.0 S5**

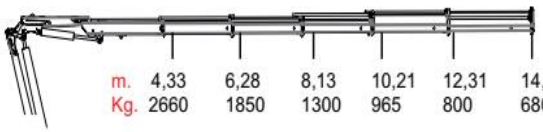

| | | | | | | |
|---|---|---|---|---|---|---|
| m. | 4,33 | 6,28 | 8,13 | 10,21 | 12,31 | 14,50 |
| Kg. | 2660 | 1850 | 1300 | 965 | 800 | 680 |

**17.0 S6**



| | | | | | | | |
|---|---|---|---|---|---|---|---|
| m. | 4,33 | 6,28 | 8,23 | 10,31 | 12,39 | 14,60 | 16,79 |
| Kg. | 2253 | 1706 | 1211 | 890 | 703 | 585 | 490 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 17.0 S2 | 11,40 | 7,88 | 410 | 290 | 30 | 1750 | 2389 | 885 | 2160 |
| 17.0 S3 | 13,50 | 10,00 | 410 | 290 | 30 | 1878 | 2389 | 885 | 2160 |
| 17.0 S4 | 15,60 | 12,20 | 410 | 290 | 30 | 1940 | 2400 | 885 | 2160 |
| 17.0 S5 | 17,85 | 14,50 | 410 | 290 | 30 | 2000 | 2430 | 885 | 2160 |
| 17.0 S6 | 20,10 | 16,79 | 410 | 290 | 30 | 2060 | 2450 | 885 | 2160 |

EXCLUSIVELY MADE IN ITALY

EXCLUSIVELY MADE IN ITALY

17.0 R

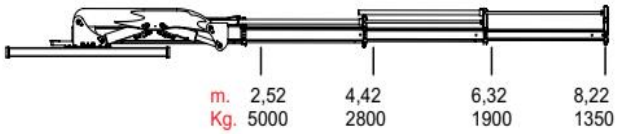

| | | | | |
|---|---|---|---|---|
| m. | 2,52 | 4,42 | 6,32 | 8,22 |
| Kg. | 5000 | 2800 | 1900 | 1350 |

Fig.1

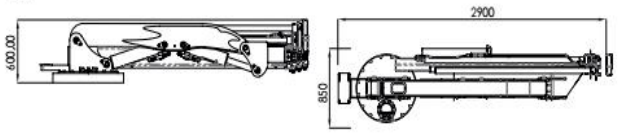


| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 17.0 S3 | 7,90 | 8,22 | 360 | 260 | 28 | 1600 | Fig.1 | Fig.1 | Fig.1 |

EXCLUSIVELY MADE IN ITALY

## *FLY JIB*

**17.0 S4 J2**



| | m. | 4,23 | 6,13 | 8,03 | 10,11 | 12,19 | 15,60 | 16,95 |
|---|---|---|---|---|---|---|---|---|
| | Kg. | 2955 | 1880 | 1310 | 1060 | 750 | 478 | 440 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **17.0 S3 J2** | 18,85 | 15,74 | 410 | 290 | 30 | 1980 | 2430 | 885 | 2460 |
| **17.0 S4 J2** | 19,51 | 16,95 | 410 | 290 | 30 | 2130 | 2450 | 885 | 2460 |

EXCLUSIVELY
MADE IN ITALY

Model 19.0

## Standard

- Up to 6 hydraulic extensions in the main boom, Superpower fly jib up to 4 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

## Optionals

- Winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

**19.0 S2**




**19.0 S3**

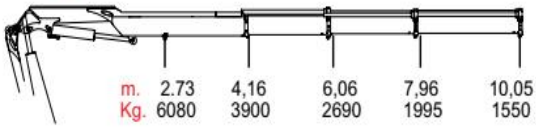


**19.0 S4**

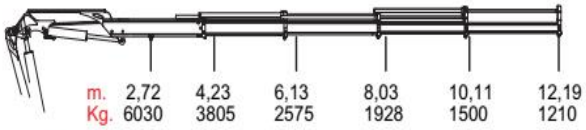


**19.0 S5**




**19.0 S6**




| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 19.0 S2 | 11,40 | 7,80 | 410 | 290 | 35 | 2151 | 2389 | 1000 | 2170 |
| 19.0 S3 | 13,50 | 10,00 | 410 | 290 | 35 | 2250 | 2400 | 1000 | 2170 |
| 19.0 S4 | 15,20 | 12,19 | 410 | 290 | 35 | 2400 | 2500 | 1000 | 2170 |
| 19.0 S5 | 17,90 | 14,50 | 410 | 290 | 35 | 2550 | 2500 | 1000 | 2170 |
| 19.0 S6 | 20,10 | 16,79 | 410 | 290 | 35 | 2600 | 2500 | 1000 | 2170 |

EXCLUSIVELY MADE IN ITALY

EXCLUSIVELY MADE IN ITALY

## FLY JIB

**19.0 S4 J2**




**19.0 S4 J3**




| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 19.0 S4 J2 | 19,00 | 17,80 | 410 | 290 | 35 | 2750 | 2500 | 1000 | 2460 |
| 19.0 S4 J3 | 22,60 | 19,47 | 410 | 290 | 35 | 2830 | 2500 | 1000 | 2480 |

### Standard

- Up to 6 hydraulic extensions in the main boom, Superpower fly jib up to 4 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

### Optionals

- Winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

EXCLUSIVELY MADE IN ITALY

Model 22.0

## Standard

- Up to 6 hydraulic extensions in the main boom, Superpower fly jib up to 4 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

## Optionals

- Winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

**22.0 S2**



| m. | 2.23 | 4.20 | 6.20 | 8.10 |
|---|---|---|---|---|
| Kg. | 8510 | 4850 | 3180 | 2250 |

**22.0 S3**



| m. | 2.73 | 4.12 | 6.02 | 7.92 | 10.01 |
|---|---|---|---|---|---|
| Kg. | 8480 | 4720 | 3160 | 2210 | 1630 |

**22.0 S4**



| m. | 4,48 | 6,43 | 8,38 | 10,33 | 12,28 | 14,36 | 16,79 |
|---|---|---|---|---|---|---|---|
| Kg. | 4180 | 2820 | 2100 | 1580 | 1220 | 1010 | 850 |

**22.0 S5**



| m. | 2.23 | 4.03 | 5.93 | 7.73 | 9.91 | 12.01 | 14.20 |
|---|---|---|---|---|---|---|---|
| Kg. | 8380 | 3950 | 2698 | 1990 | 1585 | 1315 | 1110 |

**22.0 S6**



| m. | 4,48 | 6,43 | 8,38 | 10,33 | 12,28 | 14,36 | 16,79 |
|---|---|---|---|---|---|---|---|
| Kg. | 4180 | 2820 | 2100 | 1580 | 1220 | 1010 | 850 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 22.0 S2 | 11,20 | 8,10 | 410 | 290 | 35 | 2340 | 2389 | 1000 | 2170 |
| 22.0 S3 | 13,10 | 10,10 | 410 | 290 | 35 | 2420 | 2400 | 1000 | 2170 |
| 22.0 S4 | 15,20 | 12,19 | 410 | 290 | 35 | 2500 | 2500 | 1000 | 2170 |
| 22.0 S5 | 17,60 | 14,20 | 410 | 290 | 35 | 2630 | 2500 | 1000 | 2170 |
| 22.0 S6 | 20,10 | 16,79 | 410 | 290 | 35 | 2700 | 2500 | 1000 | 2170 |

EXCLUSIVELY MADE IN ITALY

EXCLUSIVELY MADE IN ITALY

## FLY JIB

**22.0 S4 J2**



| m. | 4,23 | 6,87 | 8,82 | 10,77 | 12,72 | 14,67 | 16,27 | 17,80 |
|---|---|---|---|---|---|---|---|---|
| Kg. | 3855 | 1830 | 1305 | 1090 | 840 | 620 | 560 | 500 |

**22.0 S4 J3**



| m. | 6,87 | 8,82 | 10,77 | 12,72 | 14,67 | 16,27 | 17,87 | 19,47 |
|---|---|---|---|---|---|---|---|---|
| Kg. | 2020 | 1420 | 1110 | 830 | 600 | 530 | 460 | 410 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 22.0 S4 J2 | 19,00 | 17,80 | 410 | 290 | 35 | 2750 | 2500 | 1000 | 2460 |
| 22.0 S4 J3 | 22,60 | 19,47 | 410 | 290 | 35 | 2830 | 2500 | 1000 | 2480 |

### Standard

- Up to 6 hydraulic extensions in the main boom, Superpower fly jib up to 4 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

### Optionals

- Winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

EXCLUSIVELY MADE IN ITALY

## Standard

- Up to 6 hydraulic extensions in the main boom, Superpower fly jib up to 4 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

## Optionals

- Winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

**24.0 S2**

**24.0 S3**

**24.0 S4**




**24.0 S5**




**24.0 S6**




| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 24.0 S2 | 11,20 | 8,10 | 410 | 290 | 35 | 2490 | 2500 | 1000 | 2170 |
| 24.0 S3 | 13,30 | 10,10 | 410 | 290 | 35 | 2560 | 2500 | 1000 | 2170 |
| 24.0 S4 | 15,20 | 12,19 | 410 | 290 | 35 | 2650 | 2500 | 1000 | 2170 |
| 24.0 S5 | 17,60 | 14,20 | 410 | 290 | 35 | 2780 | 2500 | 1000 | 2170 |
| 24.0 S6 | 20,10 | 16,79 | 410 | 290 | 35 | 2850 | 2500 | 1000 | 2170 |

EXCLUSIVELY MADE IN ITALY
EXCLUSIVELY MADE IN ITALY

## FLY JIB

**24.0 S4 J2**



| m. | 4,23 | 6,87 | 8,82 | 10,77 | 12,72 | 14,67 | 16,27 | 17,80 |
|---|---|---|---|---|---|---|---|---|
| Kg. | 3955 | 1930 | 1405 | 1190 | 4940 | 4720 | 660 | 600 |

**24.0 S4 J3**



| m. | 6,87 | 8,82 | 10,77 | 12,72 | 14,67 | 16,27 | 17,87 | 19,47 |
|---|---|---|---|---|---|---|---|---|
| Kg. | 2150 | 1550 | 1280 | 900 | 700 | 620 | 550 | 500 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **24.0 S4 J2** | 19,00 | 17,80 | 410 | 290 | 35 | 2750 | 2500 | 1000 | 2460 |
| **24.0 S4 J3** | 22,60 | 19,47 | 410 | 290 | 35 | 2830 | 2500 | 1000 | 2480 |

### Standard

- Up to 6 hydraulic extensions in the main boom, Superpower fly jib up to 4 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

### Optionals

- Winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

EXCLUSIVELY MADE IN ITALY

## Standard

- Up to 8 hydraulic extensions in the main boom, Superpower fly jib up to 6 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- 'Rothe-Erde' fifth wheel (2nd hydraulic motor as optional)
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

## Optionals

- Continuos rotation, double rotation hydraulic motors, winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

EXCLUSIVELY MADE IN ITALY





**27.0 S3**



| m. | 2,94 | 4,49 | 6,05 | 7,70 | 9,55 |
|---|---|---|---|---|---|
| Kg. | 8365 | 5575 | 4025 | 3105 | 2485 |

**27.0 S4**



| m. | 2,94 | 4,59 | 6,16 | 7,81 | 9,66 | 11,58 |
|---|---|---|---|---|---|---|
| Kg. | 8030 | 5225 | 3750 | 2865 | 2265 | 1870 |

**27.0 S5**



| m. | 2,94 | 4,69 | 6,29 | 7,92 | 9,77 | 11,68 | 13,73 |
|---|---|---|---|---|---|---|---|
| Kg. | 7760 | 4935 | 3515 | 2655 | 2080 | 1685 | 1415 |

**27.0 S6**



| m. | 2,94 | 4,82 | 6,39 | 8,04 | 9,89 | 11,81 | 13,86 | 16,01 |
|---|---|---|---|---|---|---|---|---|
| Kg. | 7635 | 4735 | 3350 | 2505 | 1925 | 1545 | 1275 | 1085 |

**27.0 S7**



| m. | 2,94 | 4,85 | 6,43 | 8,87 | 9,93 | 11,85 | 13,90 | 16,05 | 18,25 |
|---|---|---|---|---|---|---|---|---|---|
| Kg. | 7185 | 4610 | 3235 | 2395 | 1815 | 1430 | 1160 | 975 | 850 |

**27.0 S8**



| m. | 2,94 | 4,91 | 6,49 | 8,14 | 9,99 | 11,91 | 13,96 | 16,11 | 18,31 | 20,51 |
|---|---|---|---|---|---|---|---|---|---|---|
| Kg. | 6400 | 4250 | 2945 | 2150 | 1595 | 1235 | 980 | 805 | 685 | 600 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 27.0 S3 | 12,95 | 9,55 | NL | 270 | 45 | 3000 | 2500 | 1252 | 2341 |
| 27.0 S4 | 14,98 | 11,58 | NL | 270 | 45 | 3150 | 2500 | 1252 | 2341 |
| 27.0 S5 | 17,03 | 13,73 | NL | 270 | 45 | 3295 | 2500 | 1252 | 2341 |
| 27.0 S6 | 19,11 | 16,01 | NL | 270 | 45 | 3435 | 2500 | 1252 | 2341 |
| 27.0 S7 | 21,55 | 18,25 | NL | 270 | 45 | 3570 | 2500 | 1252 | 2341 |
| 27.0 S8 | 23,91 | 20,51 | NL | 290 | 45 | 3700 | 2500 | 1252 | 2341 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 30.0 S3 | 12,95 | 9,55 | NL | 270 | 45 | 3000 | 2500 | 1252 | 2341 |
| 30.0 S4 | 14,98 | 11,58 | NL | 270 | 45 | 3150 | 2500 | 1252 | 2341 |
| 30.0 S5 | 17,03 | 13,73 | NL | 270 | 45 | 3295 | 2500 | 1252 | 2341 |
| 30.0 S6 | 19,11 | 16,01 | NL | 270 | 45 | 3435 | 2500 | 1252 | 2341 |
| 30.0 S7 | 21,55 | 18,25 | NL | 270 | 45 | 3570 | 2500 | 1252 | 2341 |
| 30.0 S8 | 23,91 | 20,51 | NL | 290 | 45 | 3700 | 2500 | 1252 | 2341 |

## Standard

- Up to 8 hydraulic extensions in the main boom, Superpower fly jib up to 6 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- 'Rothe-Erde' fifth wheel (2nd hydraulic motor as optional)
- Super light frame made by Swedish steel STRENX 900

EXCLUSIVELY
MADE IN ITALY



**30.0 S3**




**30.0 S4**

**30.0 S5**




**30.0 S6**

**30.0 S7**




**30.0 S8**




- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

## Optionals

- Continuos rotation, double rotation hydraulic motors, winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 33.0 S2 | 11,40 | 8,00 | NL | 270 | 45 | 2658 | 2500 | 1252 | 2341 |
| 33.0 S3 | 13,20 | 9,80 | NL | 270 | 45 | 2825 | 2500 | 1252 | 2341 |
| 33.0 S4 | 15,05 | 11,79 | NL | 270 | 45 | 2990 | 2500 | 1252 | 2341 |
| 33.0 S5 | 17,19 | 13,94 | NL | 270 | 45 | 3115 | 2500 | 1252 | 2341 |
| 33.0 S6 | 19,60 | 16,00 | NL | 270 | 45 | 3235 | 2500 | 1252 | 2341 |
| 33.0 S7 | 21,70 | 18,34 | NL | 270 | 45 | 3380 | 2500 | 1252 | 2341 |
| 33.0 S8 | 23,95 | 20,50 | NL | 270 | 45 | 3528 | 2500 | 1252 | 2341 |

### Standard

- Up to 8 hydraulic extensions in the main boom, Superpower fly jib up to 6 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- 'Rothe-Erde' fifth wheel (2nd hydraulic motor as optional)
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

### Optionals

- Continuos rotation, double rotation hydraulic motors, winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

EXCLUSIVELY MADE IN ITALY

**33.0 S2**



| m. | 5,00 | 6,57 | 8,00 |
|---|---|---|---|
| Kg. | 7120 | 5070 | 3800 |

**33.0 S3**



| m. | 5,00 | 6,57 | 8,22 | 9,80 |
|---|---|---|---|---|
| Kg. | 7020 | 4970 | 3750 | 3000 |

**33.0 S4**



| m. | 5,00 | 6,57 | 8,22 | 10,07 | 11,79 |
|---|---|---|---|---|---|
| Kg. | 6730 | 4720 | 3530 | 2790 | 2300 |

**33.0 S5**



| m. | 5,00 | 6,57 | 8,22 | 10,07 | 11,99 | 13,94 |
|---|---|---|---|---|---|---|
| Kg. | 6465 | 4500 | 3325 | 2585 | 2100 | 1760 |

**33.0 S6**



| m. | 6,57 | 8,22 | 10,07 | 11,99 | 14,04 | 16,00 |
|---|---|---|---|---|---|---|
| Kg. | 4295 | 3125 | 2390 | 1910 | 1565 | 1320 |

**33.0 S7**



| m. | 5,00 | 6,57 | 8,22 | 10,07 | 11,99 | 14,04 | 16,20 | 18,34 |
|---|---|---|---|---|---|---|---|---|
| Kg. | 5950 | 4050 | 2890 | 2165 | 1690 | 1350 | 1105 | 940 |

**33.0 S8**



| m. | 5,00 | 6,57 | 8,22 | 10,07 | 11,99 | 14,04 | 16,20 | 18,34 | 20,50 |
|---|---|---|---|---|---|---|---|---|---|
| Kg. | 5225 | 3615 | 2630 | 1955 | 1505 | 1190 | 970 | 820 | 710 |

## FLY JIB

**33.0 S6 J2**



| m. | 7,70 | 9,26 | 10,91 | 12,77 | 14,68 | 16,73 | 18,78 | 20,23 | 21,69 |
|---|---|---|---|---|---|---|---|---|---|
| Kg. | 2460 | 2200 | 1675 | 1265 | 980 | 775 | 620 | 560 | 505 |

**33.0 S6 J3**



| m. | 7,70 | 9,26 | 10,91 | 12,77 | 14,68 | 16,73 | 19,78 | 20,23 | 21,69 | 23,28 |
|---|---|---|---|---|---|---|---|---|---|---|
| Kg. | 2380 | 2120 | 1595 | 1185 | 900 | 695 | 540 | 480 | 425 | 380 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 33.0 S6 J2 | 26,29 | 21,69 | NL | 290 | 45 | 4095 | 2500 | 1252 | 2646 |
| 33.0 S6 J3 | 26,88 | 23,28 | NL | 290 | 45 | 4175 | 2500 | 1252 | 2646 |

### Standard

- Up to 8 hydraulic extensions in the main boom, Superpower fly jib up to 6 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- 'Rothe-Erde' fifth wheel (2nd hydraulic motor as optional)
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

### Optionals

- Continuos rotation, double rotation hydraulic motors, winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

EXCLUSIVELY MADE IN ITALY

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 37.0 S2 | 11,40 | 8,00 | NL | 270 | 45 | 2950 | 2500 | 1252 | 2341 |
| 37.0 S3 | 13,20 | 9,80 | NL | 270 | 45 | 3100 | 2500 | 1252 | 2341 |
| 37.0 S4 | 15,05 | 11,79 | NL | 270 | 45 | 3250 | 2500 | 1252 | 2341 |
| 37.0 S5 | 17,19 | 13,94 | NL | 270 | 45 | 3395 | 2500 | 1252 | 2341 |
| 37.0 S6 | 19,60 | 16,00 | NL | 270 | 45 | 3535 | 2500 | 1252 | 2341 |
| 37.0 S7 | 21,70 | 18,34 | NL | 290 | 45 | 3670 | 2500 | 1252 | 2341 |
| 37.0 S8 | 23,95 | 20,50 | NL | 290 | 45 | 3800 | 2500 | 1252 | 2341 |

## Standard

- Up to 8 hydraulic extensions in the main boom, Superpower fly jib up to 6 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- 'Rothe-Erde' fifth wheel (2nd hydraulic motor as optional)
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

## Optionals

- Continuos rotation, double rotation hydraulic motors, winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

EXCLUSIVELY
MADE IN ITALY



### 37.0 S2




### 37.0 S3




### 37.0 S4

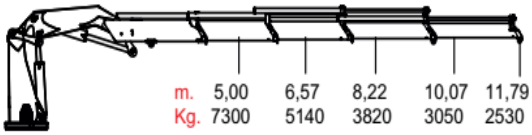


### 37.0 S5

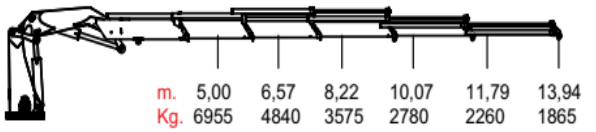


### 37.0 S6

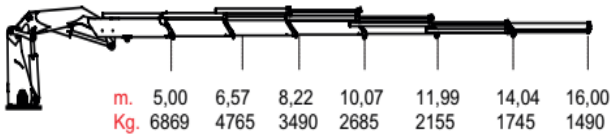


### 37.0 S7




### 37.0 S8



## Model 37.0

### *FLY JIB*

**37.0 S6 J2**

| m. | 7,70 | 9,26 | 10,91 | 12,77 | 14,68 | 16,73 | 18,78 | 20,23 | 21,69 |
|---|---|---|---|---|---|---|---|---|---|
| Kg. | 2580 | 2300 | 1765 | 1365 | 1080 | 875 | 720 | 660 | 605 |

**37.0 S6 J3**

| m. | 7,70 | 9,26 | 10,91 | 12,77 | 14,68 | 16,73 | 18,78 | 20,23 | 21,69 | 23,28 |
|---|---|---|---|---|---|---|---|---|---|---|
| Kg. | 2500 | 2240 | 1705 | 1305 | 1020 | 815 | 660 | 600 | 545 | 500 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 37.0 S6 J2 | 25,29 | 21,69 | NL | 290 | 45 | 4095 | 2500 | 1252 | 2646 |
| 37.0 S6 J3 | 26,88 | 23,28 | NL | 290 | 45 | 4175 | 2500 | 1252 | 2646 |

### Standard

- Up to 8 hydraulic extensions in the main boom, Superpower fly jib up to 6 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- 'Rothe-Erde' fifth wheel (2nd hydraulic motor as optional)
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

### Optionals

- Continuos rotation, double rotation hydraulic motors, winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

DN DellaPietra Nawcranes

EXCLUSIVELY
MADE IN ITALY

## Standard

- Up to 8 hydraulic extensions in the main boom, Superpower fly jib up to 6 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- 'Rothe-Erde' fifth wheel (2nd hydraulic motor as optional)
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

## Optionals

- Continuos rotation, double rotation hydraulic motors, winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

EXCLUSIVELY
MADE IN ITALY

### 44.0 S3




### 44.0 S4




### 44.0 S5




### 44.0 S6

### 44.0 S7




### 44.0 S8




| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 44.0 S2 | 11,40 | 8,00 | NL | 270 | 45 | 3225 | 2500 | 1252 | 2341 |
| 44.0 S3 | 13,20 | 9,80 | NL | 270 | 45 | 3392 | 2500 | 1252 | 2341 |
| 44.0 S4 | 15,05 | 11,79 | NL | 270 | 45 | 3530 | 2500 | 1252 | 2341 |
| 44.0 S5 | 17,19 | 13,94 | NL | 270 | 45 | 3655 | 2500 | 1252 | 2341 |
| 44.0 S6 | 19,60 | 16,00 | NL | 270 | 45 | 3825 | 2500 | 1252 | 2341 |
| 44.0 S7 | 21,70 | 18,34 | NL | 290 | 45 | 3944 | 2500 | 1252 | 2341 |
| 44.0 S8 | 23,95 | 20,50 | NL | 290 | 45 | 4090 | 2500 | 1252 | 2341 |

## Model 44.0

### *FLY JIB*

**44.0 S6 J3**

| m. | 7,70 | 9,26 | 10,91 | 12,77 | 14,68 | 16,73 | 18,78 | 20,23 | 21,69 | 23,28 |
|---|---|---|---|---|---|---|---|---|---|---|
| Kg. | 2590 | 2310 | 1775 | 1375 | 1090 | 885 | 720 | 657 | 615 | 576 |

**44.0 S6 J4**

| m. | 7,70 | 9,26 | 10,91 | 12,77 | 14,68 | 16,73 | 18,78 | 20,23 | 21,69 | 23,28 | 24,97 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Kg. | 2250 | 2270 | 1735 | 1335 | 1050 | 845 | 670 | 617 | 575 | 536 | 500 |

| | mt | mt | | bar | l/min | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 44.0 S6J3 | 26,88 | 23,28 | NL | 290 | 45 | 4175 | 2550 | 1252 | 2646 |
| 44.0 S6J4 | 30,27 | 24,97 | NL | 290 | 45 | 4175 | 2550 | 1252 | 2646 |

### Standard

- Up to 8 hydraulic extensions in the main boom, Superpower fly jib up to 6 telescopical extensions
- Double power links between 1st and 2nd boom
- 15° negative angle on the second boom
- 'Rothe-Erde' fifth wheel (2nd hydraulic motor as optional)
- Super light frame made by Swedish steel STRENX 900
- Hydraulic outriggers, driven by an independent valve bank
- Linear levers radio remote control Scanreco RC 400, connected to proportional HAWE valve bank
- Heat exchanger
- Electronic control system with automatic downgrading of the loadings in front of the cabin of the vehicle and possibility to operate in different stabilization configurations
- Anti-corrosion treatment on all pins, joints and pipes
- Steel oil tank

### Optionals

- Continuos rotation, double rotation hydraulic motors, winch, personnel basket duly approved for PLE CE, surface treatment for marine environment, hydraulically translated stabilizers, version with a shorter secondary boom, radio remote control with joystick, mechanical extensions, working light which can be activated by radio remote control, supplementary functions hoses by metal trays or hose reel, for the use of hydraulic accessories.

EXCLUSIVELY
MADE IN ITALY

# ADDITIONAL ELEVATING & STABILIZERS

Dall'Aglio-Newcranes

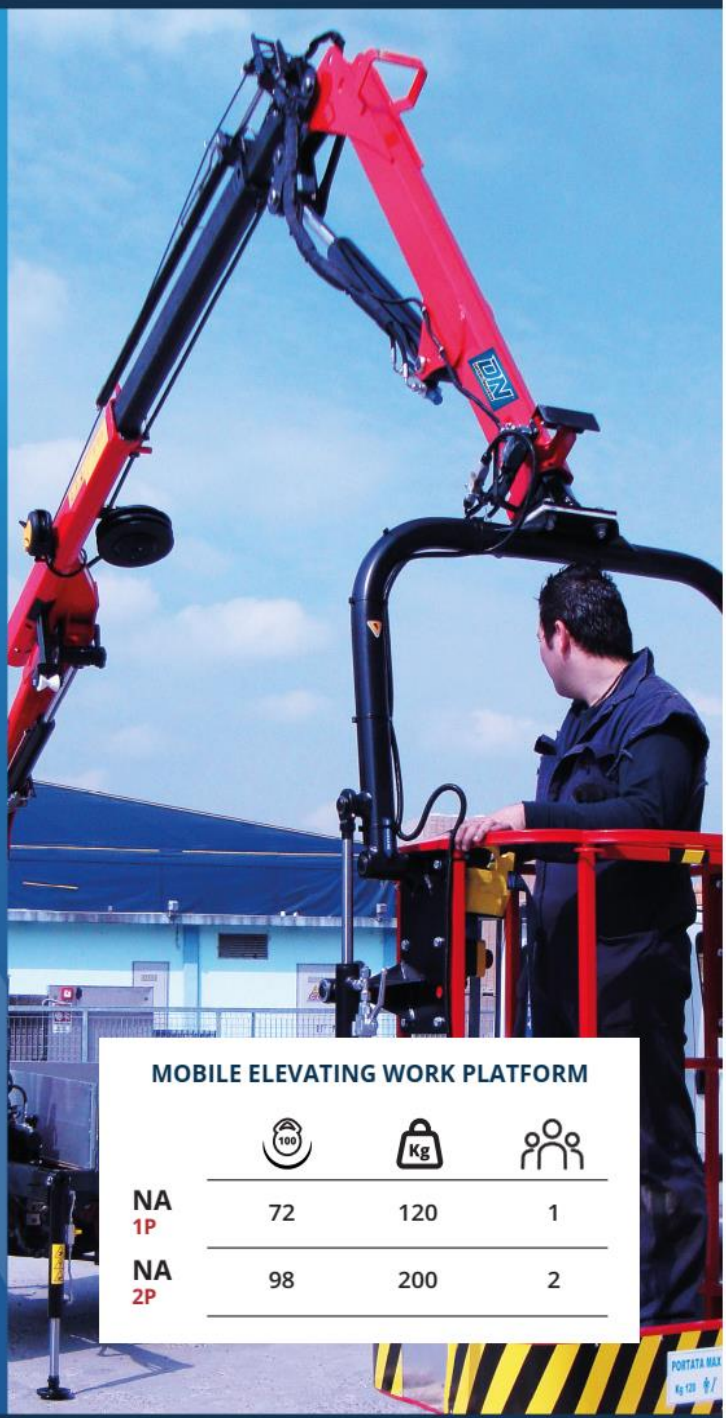

**MOBILE ELEVATING WORK PLATFORM**

| | 100 | Kg | |
|---|---|---|---|
| **NA** 1P | 72 | 120 | 1 |
| **NA** 2P | 98 | 200 | 2 |

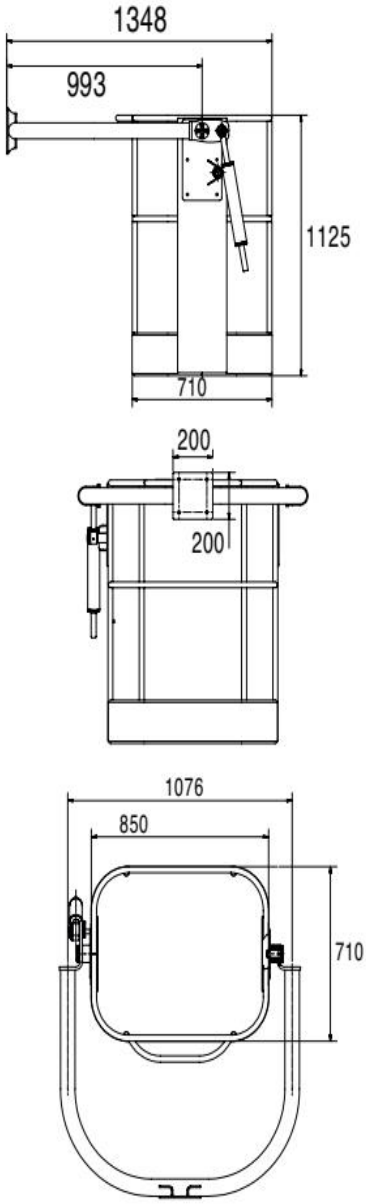


| | Kg | 100 | |
|---|---|---|---|
| NA 1P | 72 | 120 | 1 |

EXCLUSIVELY MADE IN ITALY

EXCLUSIVELY MADE IN ITALY

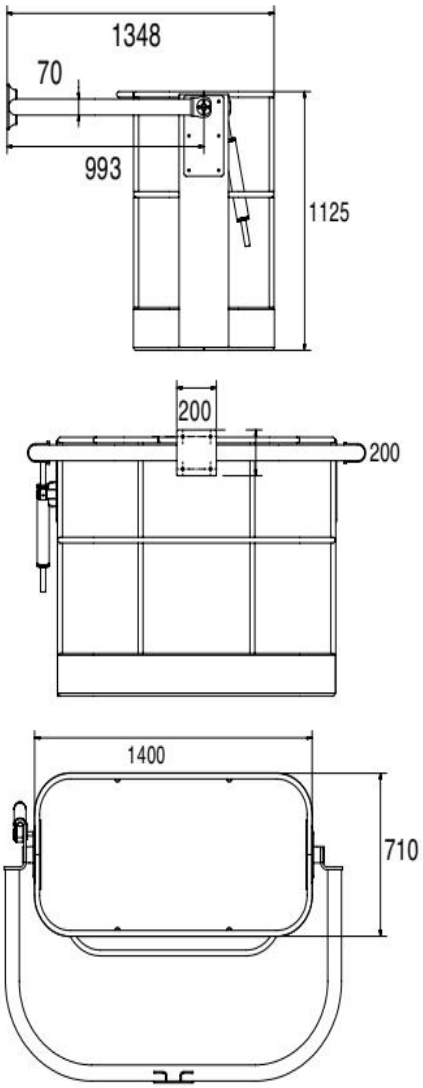


| | Kg | 100 | |
|---|---|---|---|
| NA 2P | 98 | 200 | 2 |

EXCLUSIVELY MADE IN ITALY

EXCLUSIVELY MADE IN ITALY

**TRAFCR**

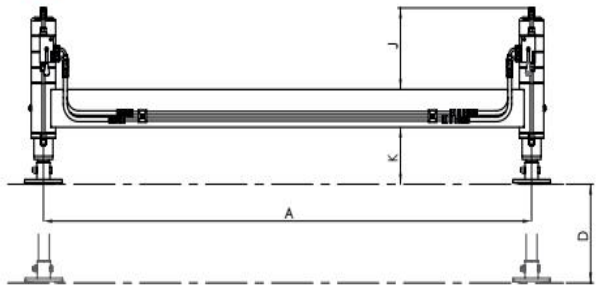


**TRALCR**

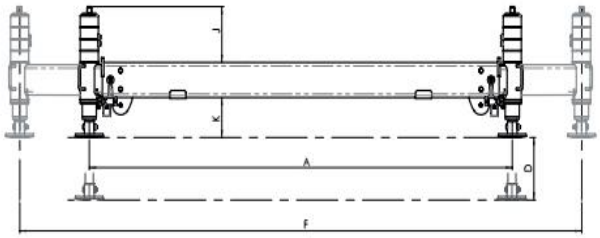


**TRAPCR**

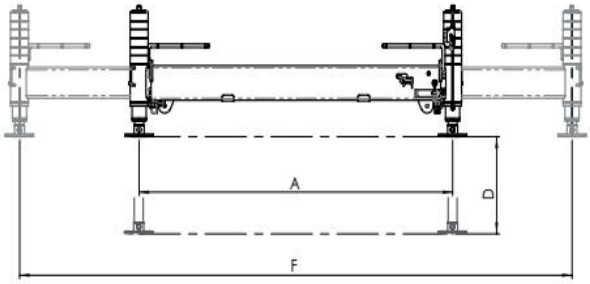


EXCLUSIVELY
MADE IN ITALY

EXCLUSIVELY
MADE IN ITALY

Additional Stabilizers



| TON X M | MODEL | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | HYDRAULIC EXTENSIONS | |
|---|---|---|---|---|---|---|---|---|
| 2-4 | TRAFCR 1800 | 1800 | 560 | 195 | 320 | 1960 | * | Fixed stabilizers |
| 5-10 | TRAFCR 2000 | 2000 | 560 | 195 | 320 | 2160 | * | Fixed stabilizers |
| 2-4 | TRALCR 1800 | 1800 | 560 | 240 | 320 | 1960 | * | Stabilizers with opposed rods |
| 4-10 | TRALCR 2100 | 2100 | 560 | 250 | 320 | 2260 | V | Stabilizers with opposed rods |
| 10-23 | TRALCR 2300 | 2300 | 560 | 250 | 320 | 2490 | V | Stabilizers with opposed rods |
| 2-10 | TRAPCR 1700 | 1550 | 560 | 330 | 320 | 1695 | * | Stabilizers with parallel rods |
| 10-23 | TRAPCR 2300 | 2100 | 760 | 370 | 370 | 2300 | V | Stabilizers with parallel rods |

| TON X M | MODEL | F (mm) | J min - max (mm) | K min - max (mm) | a (mm) | b (mm) | HYDRAULIC EXTENSIONS | |
|---|---|---|---|---|---|---|---|---|
| 2-4 | TRAFCR 1800 | * | 180-380 | 60-260 | 80 | 120 | * | Fixed stabilizers |
| 5-10 | TRAFCR 2000 | * | 180-380 | 60-260 | 80 | 120 | * | Fixed stabilizers |
| 2-4 | TRALCR 1800 | 2800 | 171-371 | 69-269 | 80 | 120 | * | Stabilizers with opposed rods |
| 4-10 | TRALCR 2100 | 3300 | 171-371 | 40-240 | 100 | 150 | V | Stabilizers with opposed rods |
| 10-23 | TRALCR 2300 | 3300 | 221-421 | 40-240 | 100 | 200 | V | Stabilizers with opposed rods |
| 2-10 | TRAPCR 1700 | 3505 | 170-370 | 40-240 | 156 | 150 | * | Stabilizers with parallel rods |
| 10-23 | TRAPCR 2300 | 4700 | 210-510 | 50-350 | 200 | 200 | V | Stabilizers with parallel rods |

EXCLUSIVELY MADE IN ITALY

EXCLUSIVELY MADE IN ITALY

# Datos de Contacto

DNCRANE representada en el mercado de Las Americas por AMERITRADEX

Oficina de fabrica direccionada para la region, y asi proporcionarle un mejor servicio al cliente en el mercado local.

Representacion oficial de DNCRANE
USA, Mexico, America Central, El Caribe, Sur America.

35 años de experiencia trading, con países en el mercado internacional.

## DNCRANE


*Lic. Eduardo Figeac*
*Marketing Director*
*LATAM-USA*
*Tampa, USA 1 813 699 3800*
*México oficina 52 55 8421 7777*
*El Salvador +503 7472 7233*
*+503 7527 7750*
www.figeaccorp.com
efigeac@ameritradex.co