SPEEDING

QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD





公司简介
COMPANY PROFILE

Qingdao SpeedingInternationaltrade Co.,LTD. was established in 2021, located at Tongshun Garden, Chengyang District, Qingdao City, with a registered capital of three million yuan. The main export products include WPC, UV, SPC, PE, PU, PS etc building material; the company's office area is 502 square meters, mainly exporting to the Middle East, Southeast Asia, South America, and other markets. In 2024, the sales revenue is expected to reach 25 million yuan. Since its establishment, the company has participated in 4 international exhibitions abroad, including the Philippines International Building Materials Exhibition, Vietnam International Building Materials Exhibition, Thailand International Building Materials Exhibition, and Saudi Big 5 Exhibition.

公司优势
COMPANY ADVANTAGES


Our company's products are made of environmentally friendly materials such as pollution-free, formaldehyde free, waterproof, moisture resistant, fire-resistant, and wear-resistant. From filtering raw materials to processing, production, inspection, packaging, and sales, all of these are comprehensively completed by the company, and the quality of the products is guaranteed. We have more than ten years of production experience and sales team, providing customers with high-quality services.

SPEEDING


QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD

WPC bamboo charcoal panel




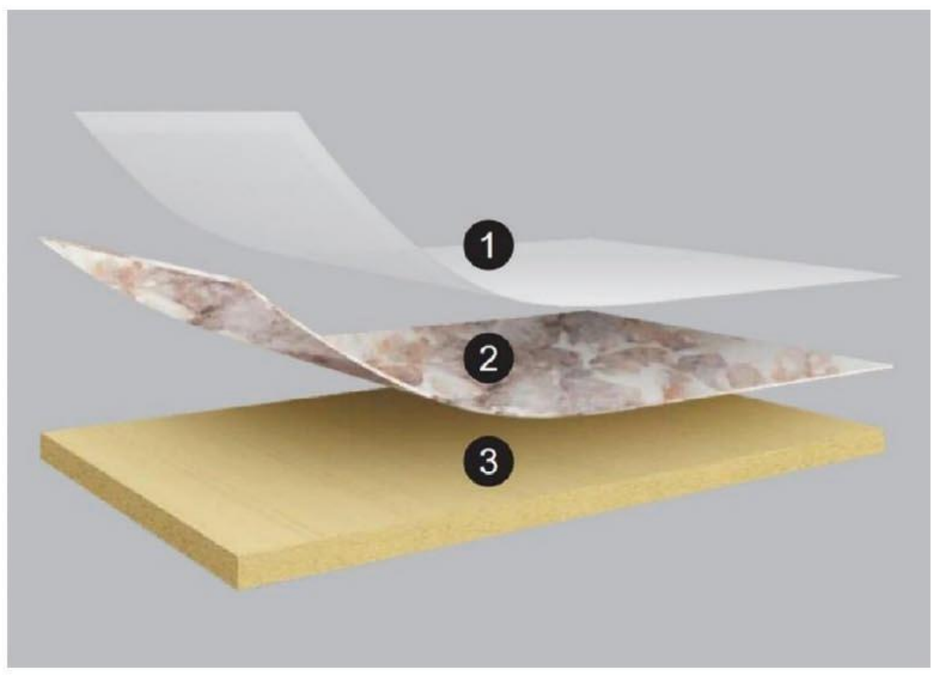

Component

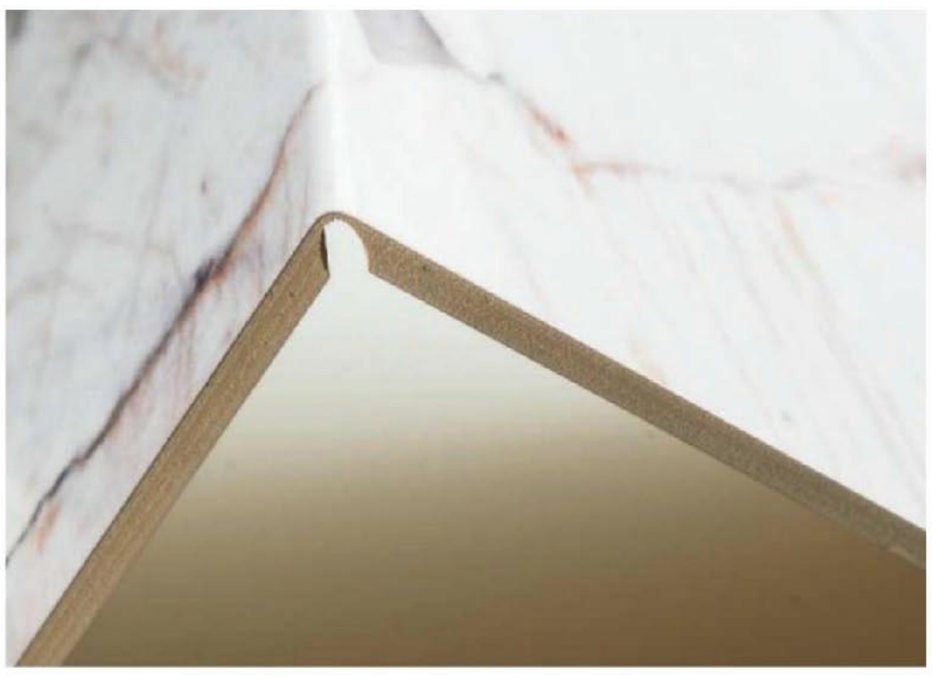


Bending

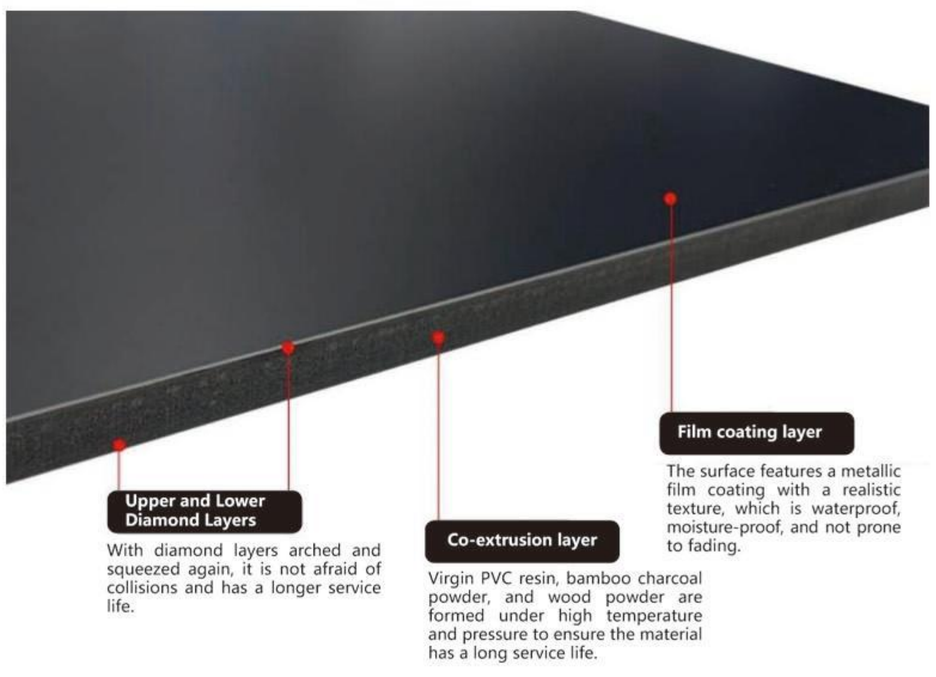

Black section



Yellow section

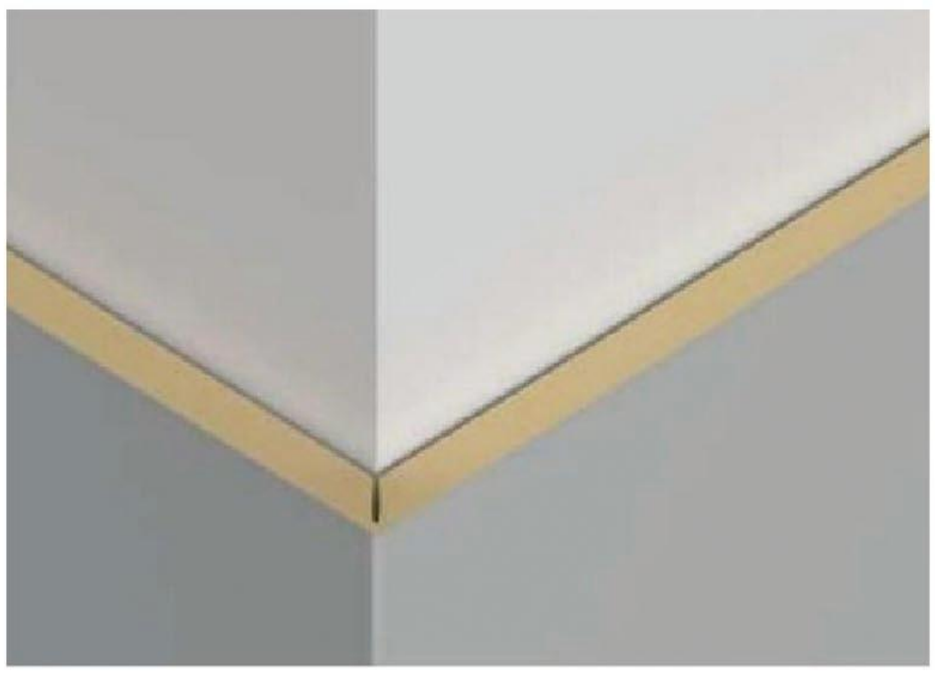

Slotting




Series Summary

SPEEDING
QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD


Effect Diagram of Continuous Pattern




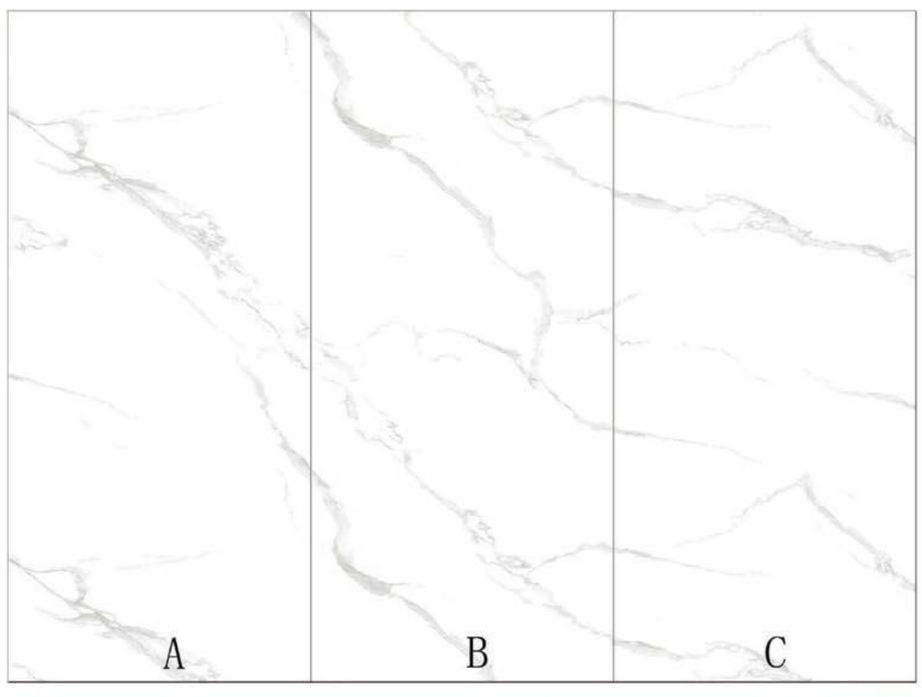




Series

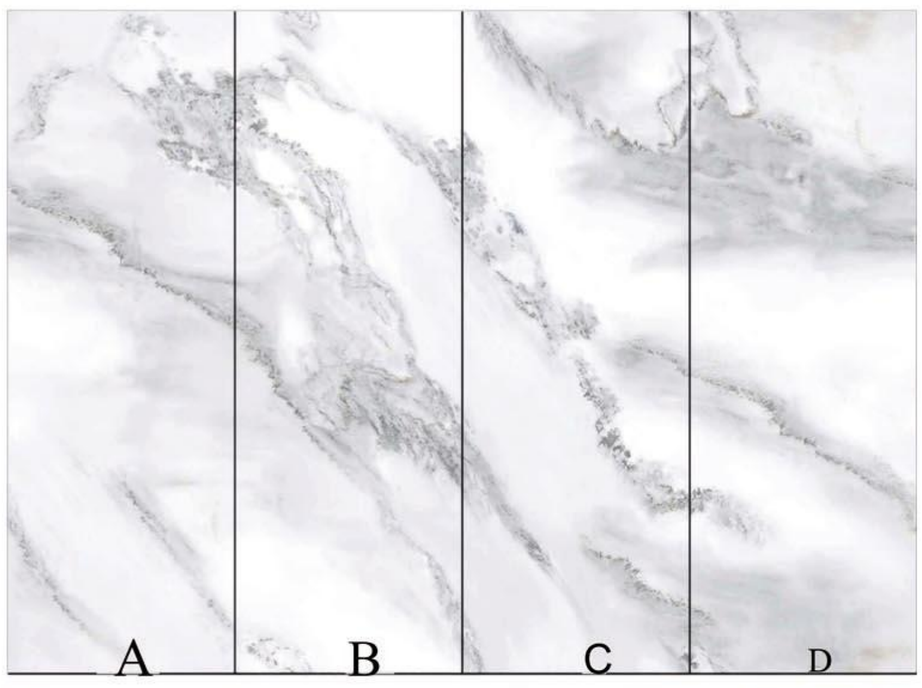

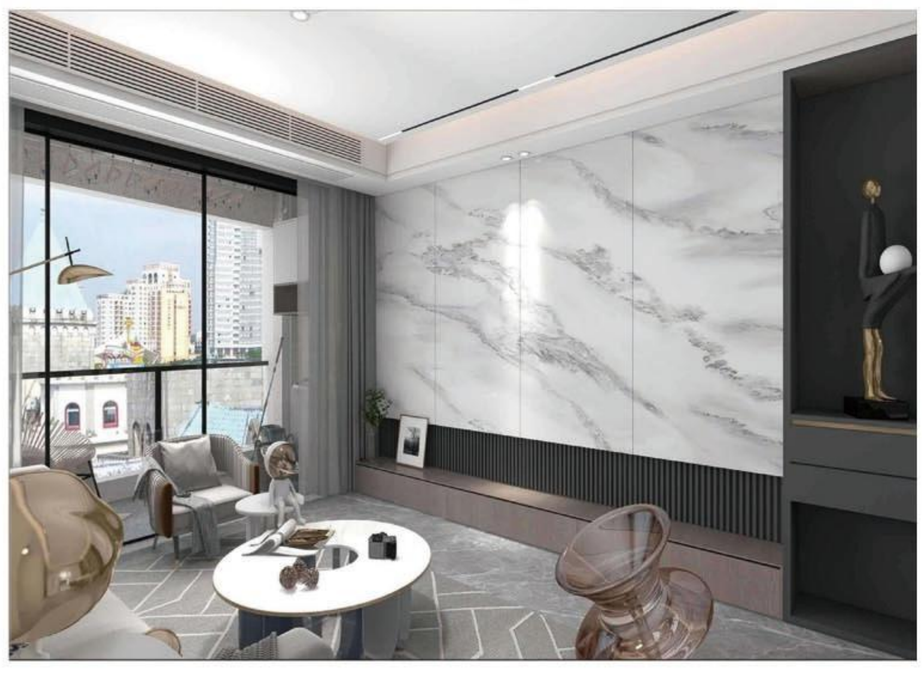

Series

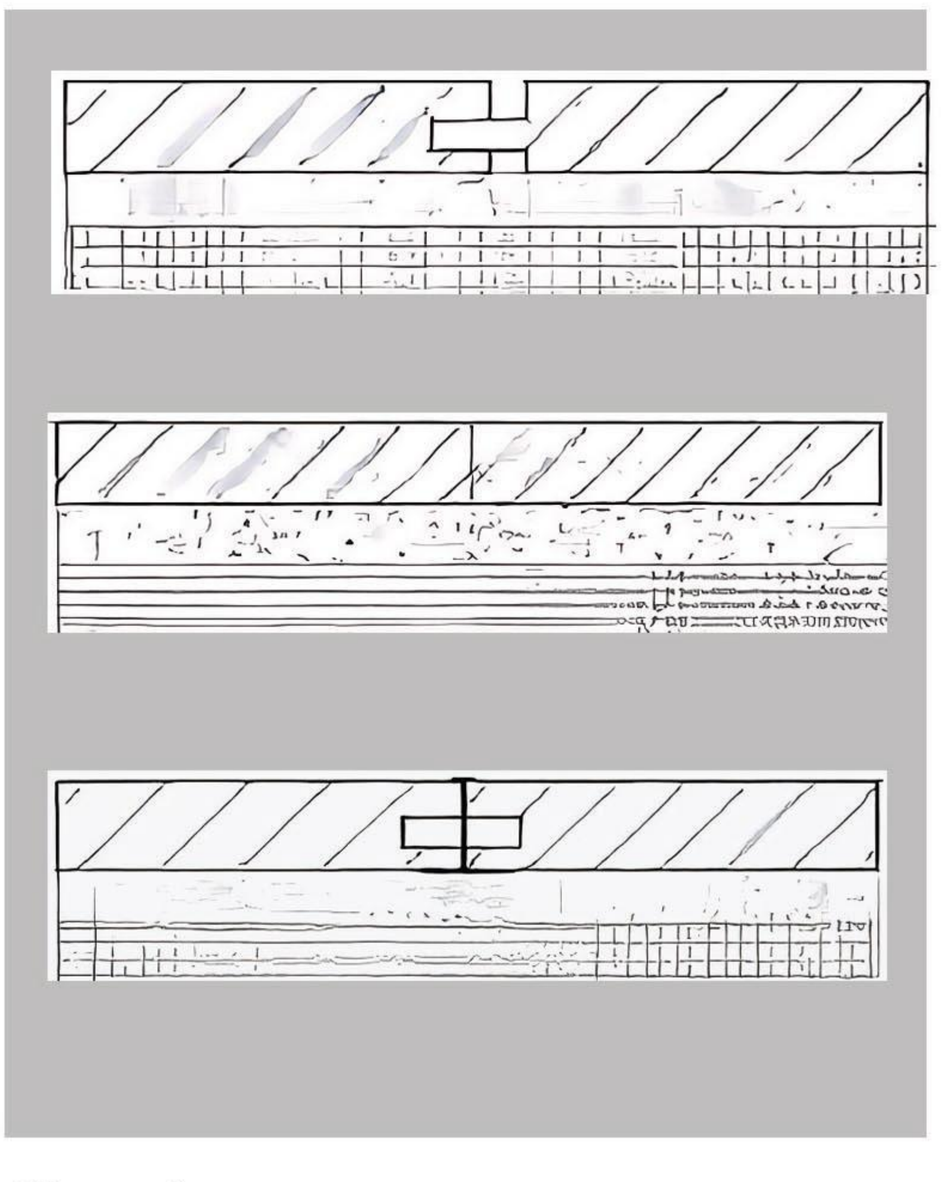

Slotting





1. Apply structural adhesive on the back
2. Metal profile connection
3. Puttying and leveling



Corner slotting and bending
1. Slotting of trimming machine
2. Hot air gun heating bending
3. Apply structural adhesive on the back of the wall pan




Apply structural adhesive on the back

Installation effect

SPEEDING
QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD


WPC WALL PANEL

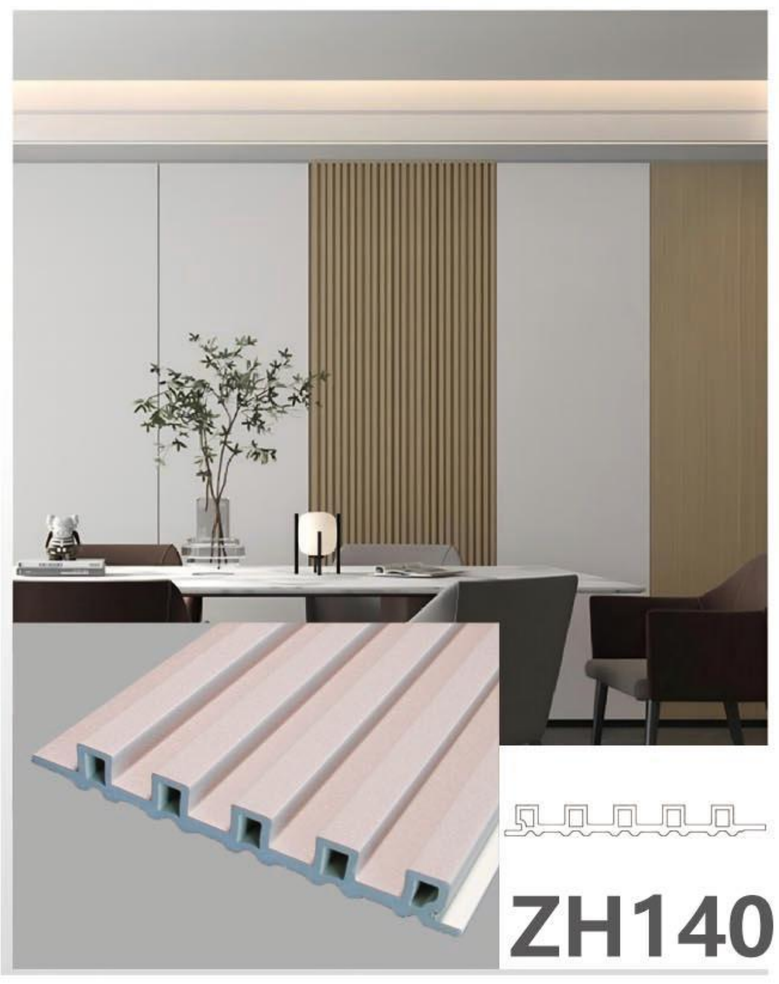

ZH140



ZH16022

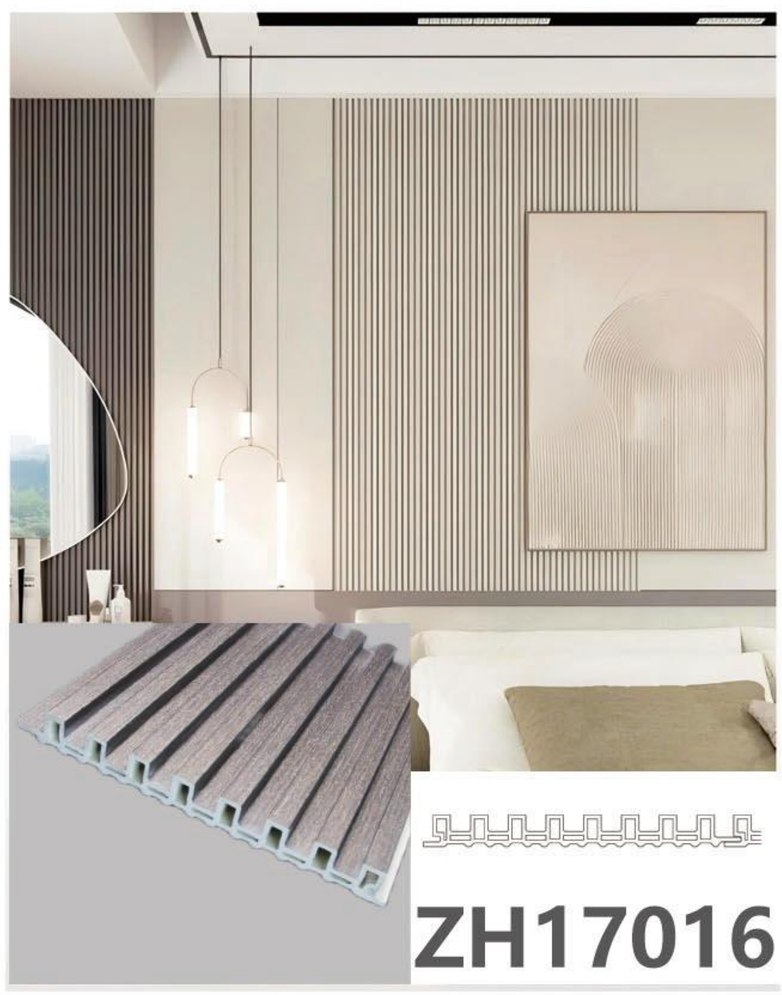


ZH17016




ZH17018



ZH2009

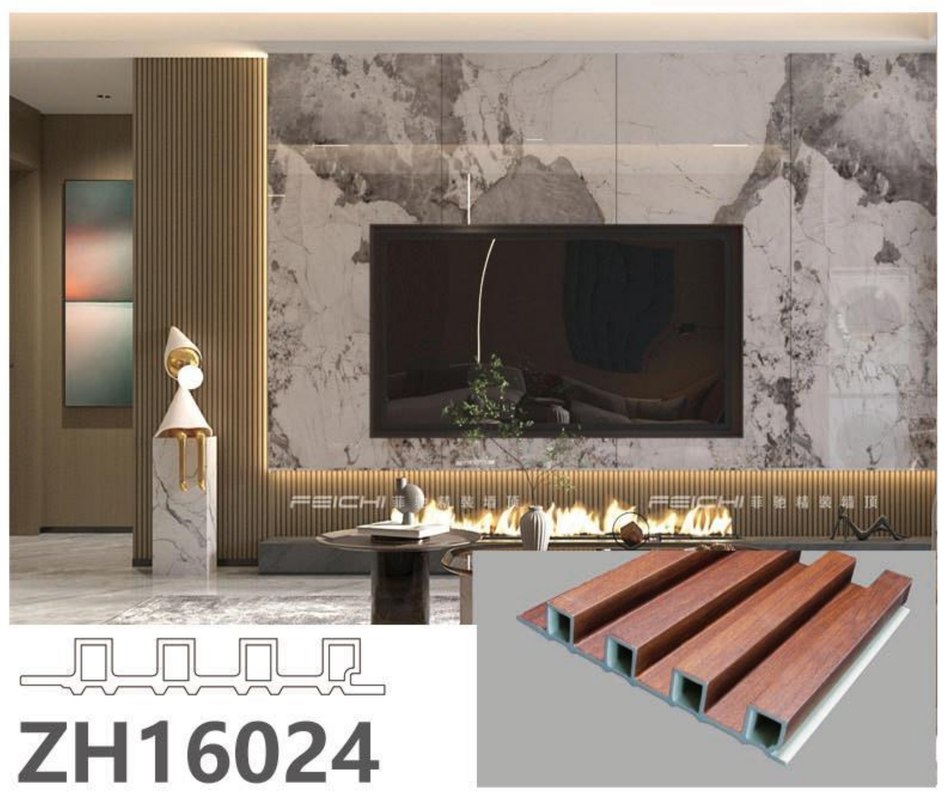

ZH16024

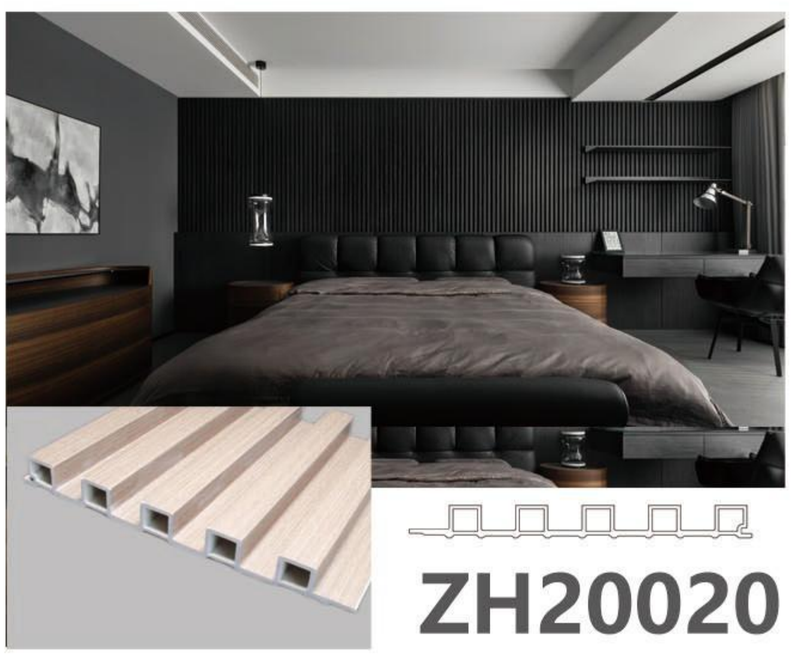

ZH20020



ZH160S

SPEEDING
QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD

WPC WALL PANEL



ZH150



ZH14712



ZH1509



ZH1479



ZH20227



ZH19512



ZH15914




ZH1509

SPEEDING
QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD

WPC WALL PANEL



ZH80

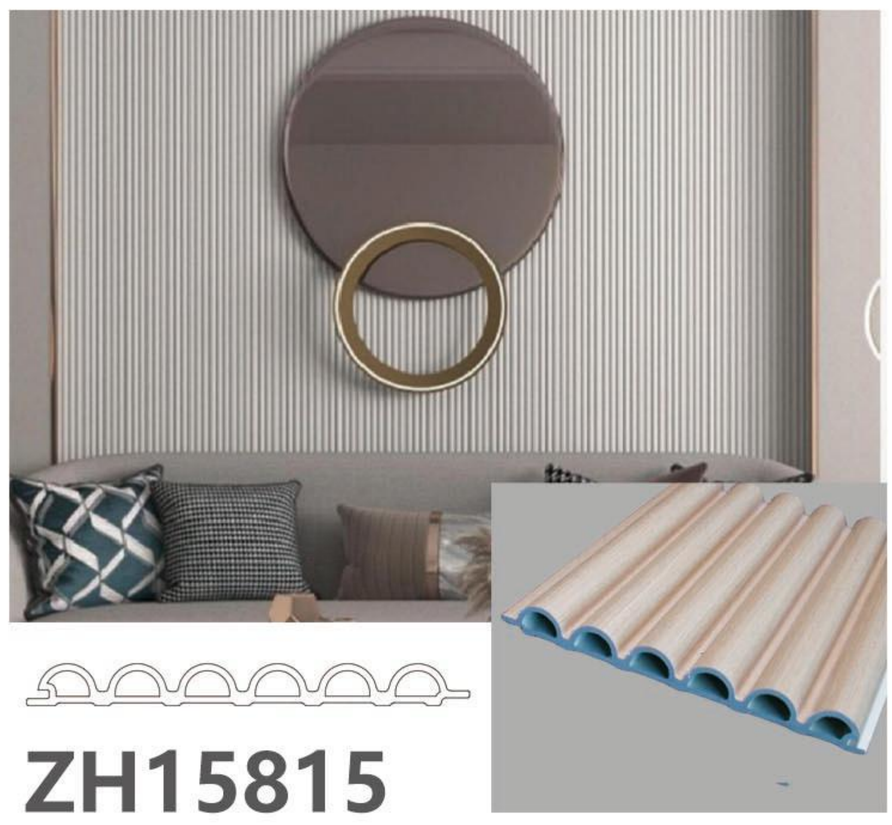

ZH15815




ZH15915



ZH204



ZH10050

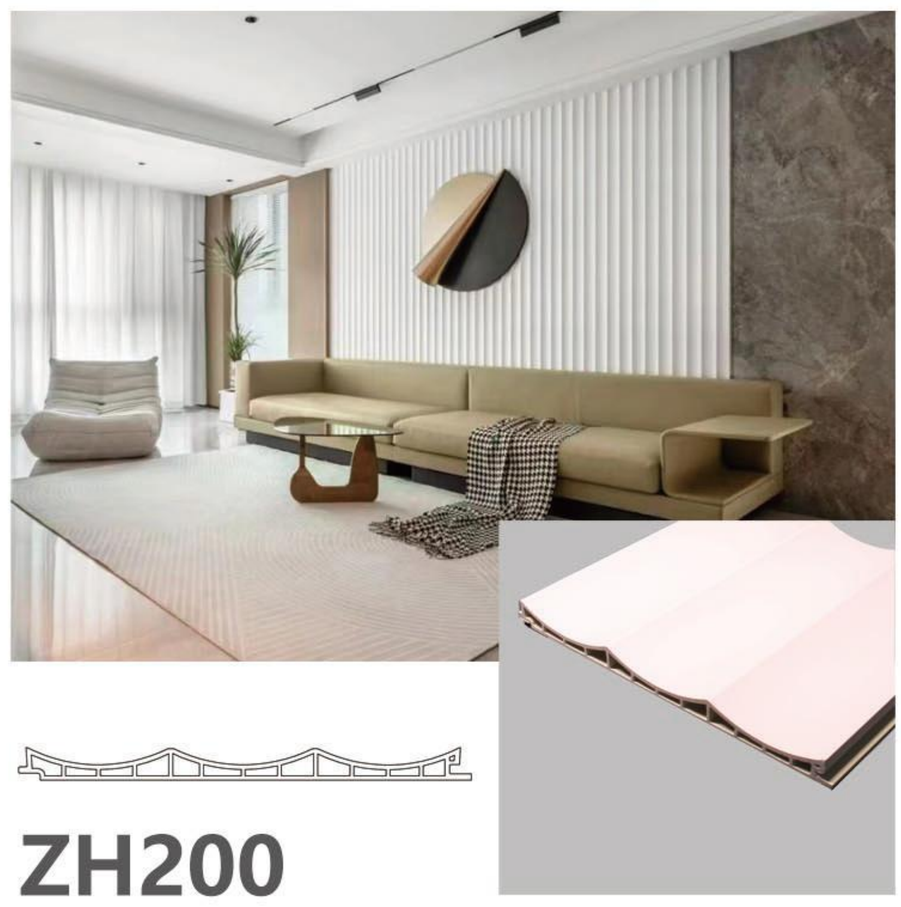

ZH200



ZH5080120



ZH158

SPEEDING
QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD


FLEXIBLE STONE



安装效果图
（3D洞石冰火灰）




安装效果图
（夯土板自定色）

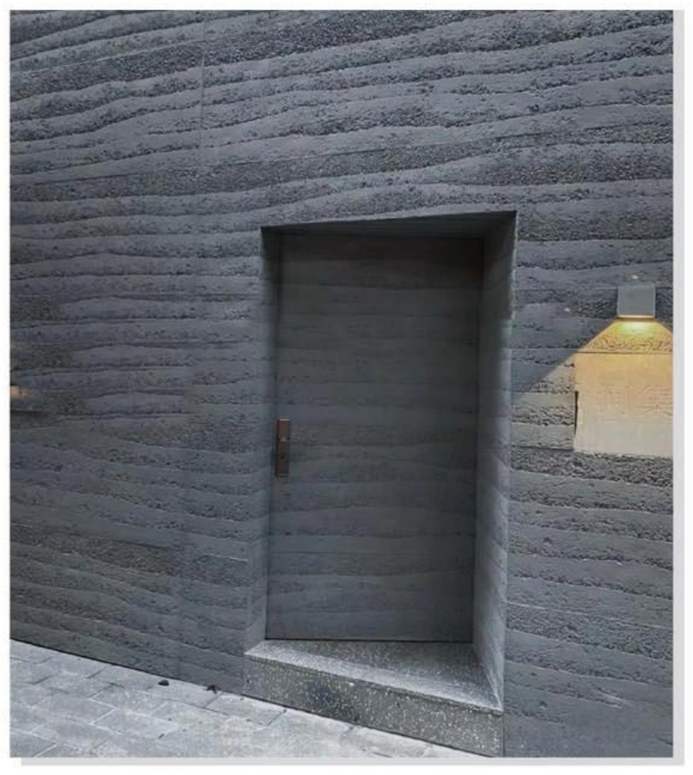

安装效果图
（夯土板自定色）

COLOR SERIES

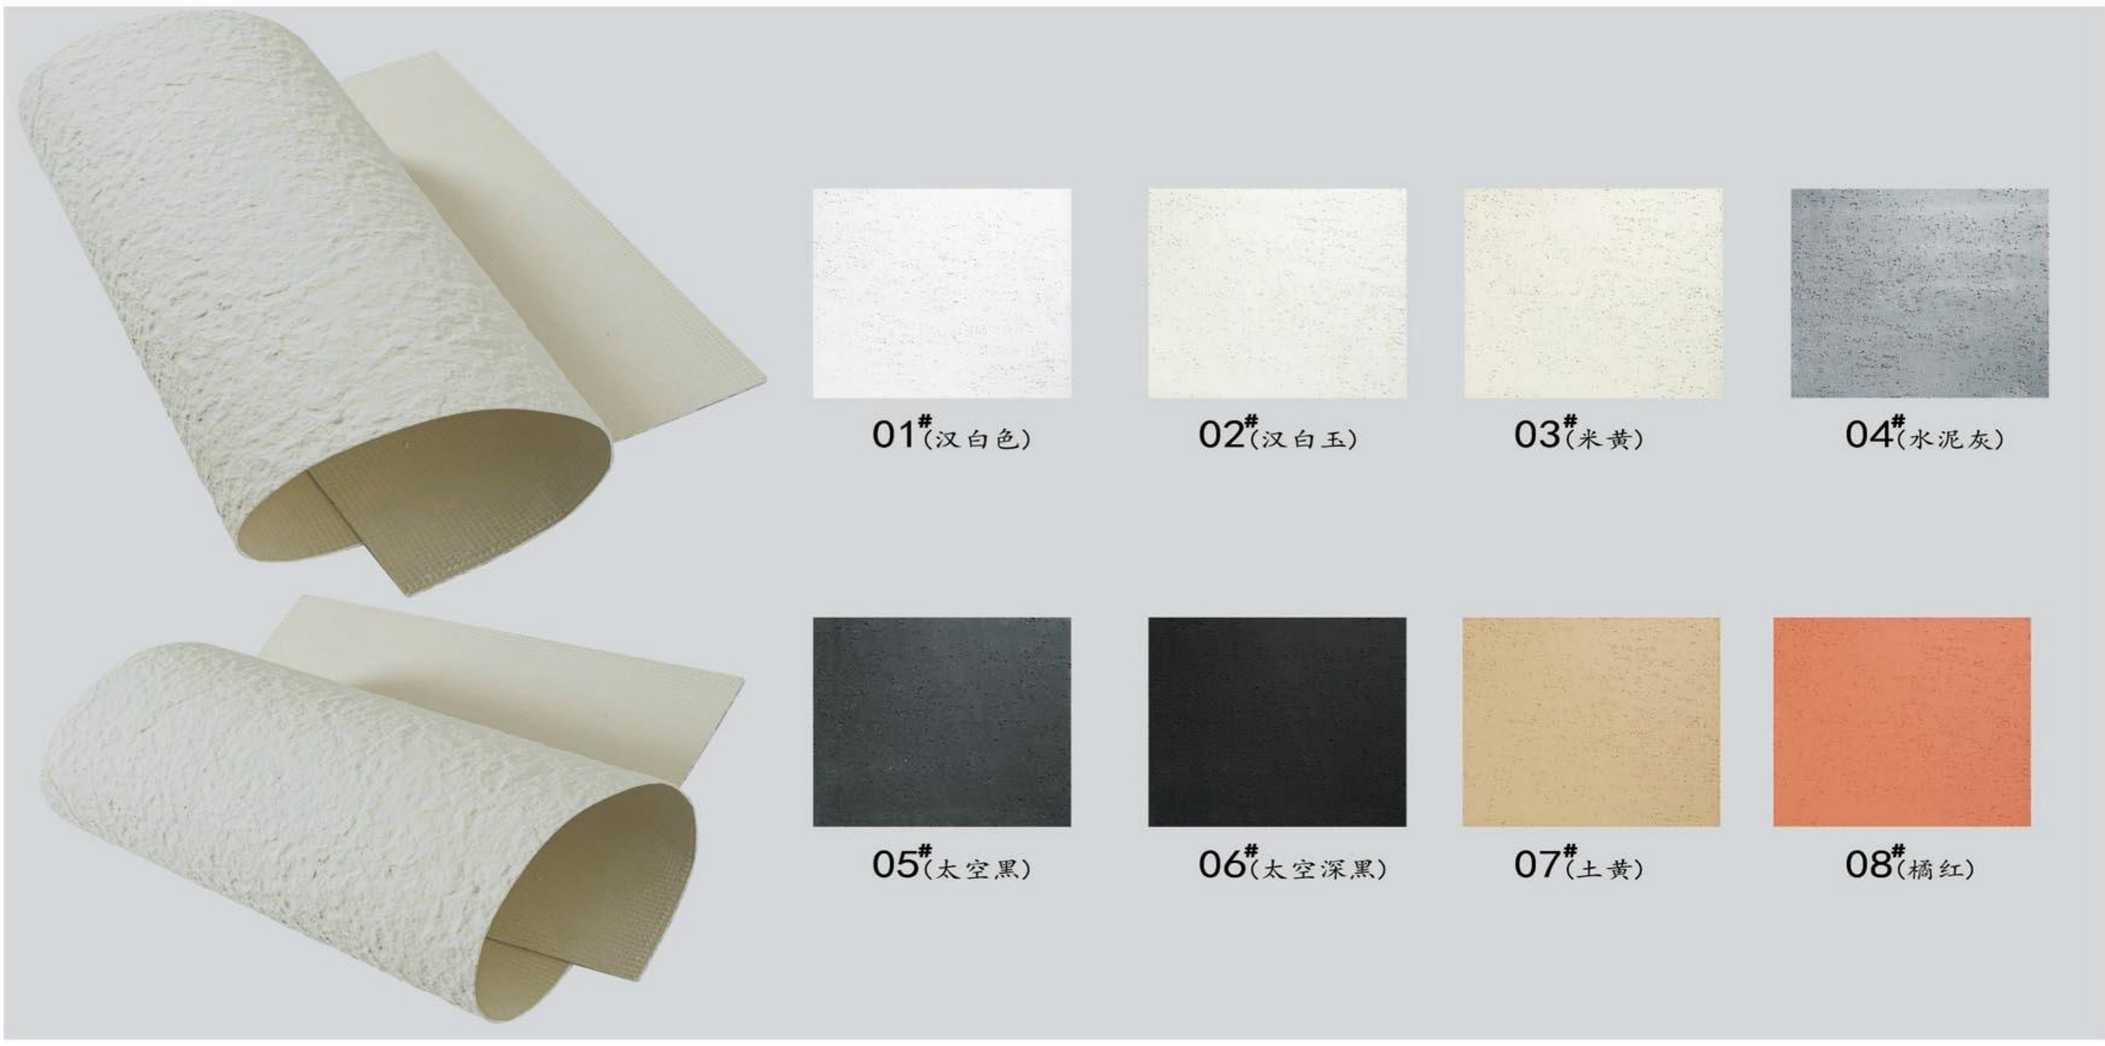

CLASSIC TRAVERTINE



3D洞石（古剑云浅白）
SIZE:1200*600



3D洞石（古剑云青黄）
SIZE:1200*600



安装效果图
（3D洞石罗马米黄）




安装效果图
（3D洞石罗马青灰）



安装效果图
（3D洞石罗马白）


INSTALL REAL EFFECT DIAGRAM

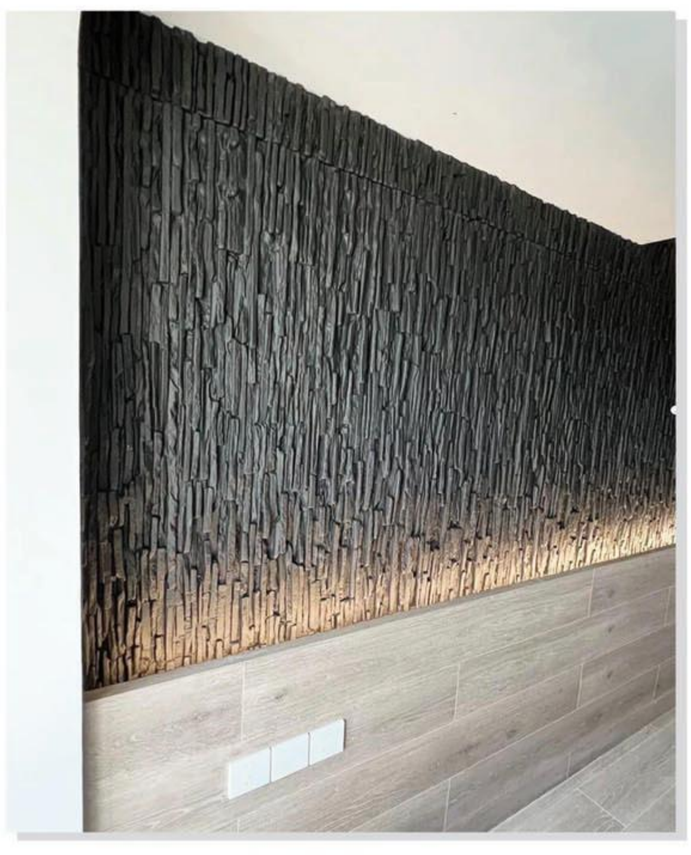

安装效果图
（岁月痕太空深黑）



安装效果图
（星月石汉白色）

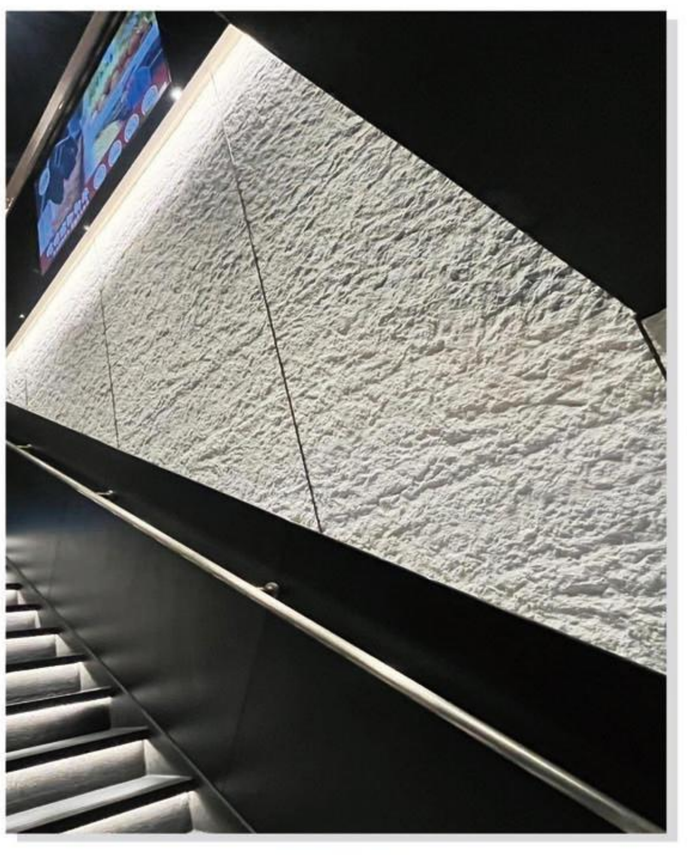

安装效果图
（星月石汉白色）

SPEEDING

QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD

ACOUSTIC PANEL

A COUSTIC PANEL

More styles can be customized upon request

PROCESS INTRODUCTION



SPECIFICATIONS

Name	Acoustic Panel|Ceiling
Base Material	MDF Board|black HDF Board|PET Fiber
Finish	Paper |wood Veneer|PVC
Length	2400~3000 mm
Width	285mm|305mm|605mm
Thickness	21mm|24mm
Fire Performance	HDF is flame-retardant
Water proof	HDF is moisture-proof
Installation	Screws or mounting glue
Clean	Clean with a vacuum cleaner or a dry cloth, not with water

ADVANTAGES

Effective noise reduction
Sound-absorbing felt mitigates noise and reduced unwanted reverberations.

Rich in color and shape
Versatile woodgrain colors and finishes to appeal to any style of home or office


Easy installation
Once the dimensions are clear,it only requires no-nail adhesive or nails to fix it to the wall

Size can be customized

CE TESTING

IV.Test Result

Freguency f/Hz	Absorption Coefficient, α
100	0.13
25	0.19
60	0.23
200	0.35
250	0.44
315	0.60
400	07
500	0.93
630	1.00
300	0.9
1000	0.91
1250	0.78
1600	0.69
2000	0.81
2500	0.87
3150	0.81
4000	0.84
5000	0.81
ās	0.67
NRC	0.75

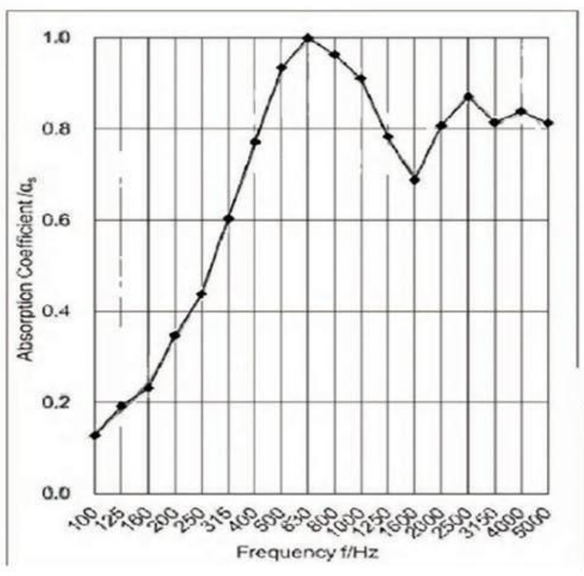

Requirement in EN 15102:2007+A1:2011 table 2:

Heavy metal or element	Maximum migration in mg/kg
Soluble Lead(Pb)	No upper limit
Soluble Antimony (Sb)	25
Soluble Arsenic(As)	500
Soluble Barium(Ba)	25
Soluble Cadmium (Cd)	60
Soluble Chromium (Cr)	90
Soluble Mercury (Hg)	20
Soluble Selenium (Se)	165

Conclusion: Pass

Summary of Results:

No.	Test Item	Test Method	Result	Conclusion
2	Formaldehyde Release	With reference to EN 15102:2007+A1:2011 Section 4.2& EN 12149:1997 test C, analysis was performed by UV-Vis	ND	Pass


ACOUSTIC PANEL




HJ01F01-MJ03-(12x18mm)




HJ01F01-MJ01(12x25mm)

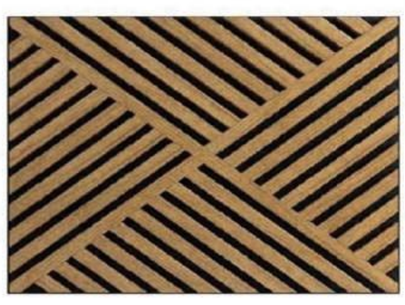



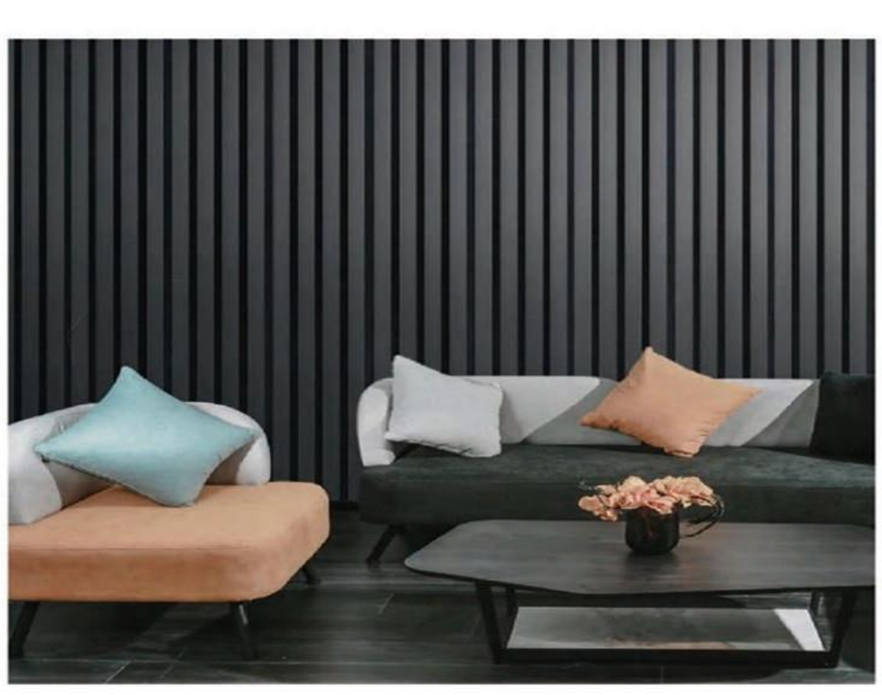

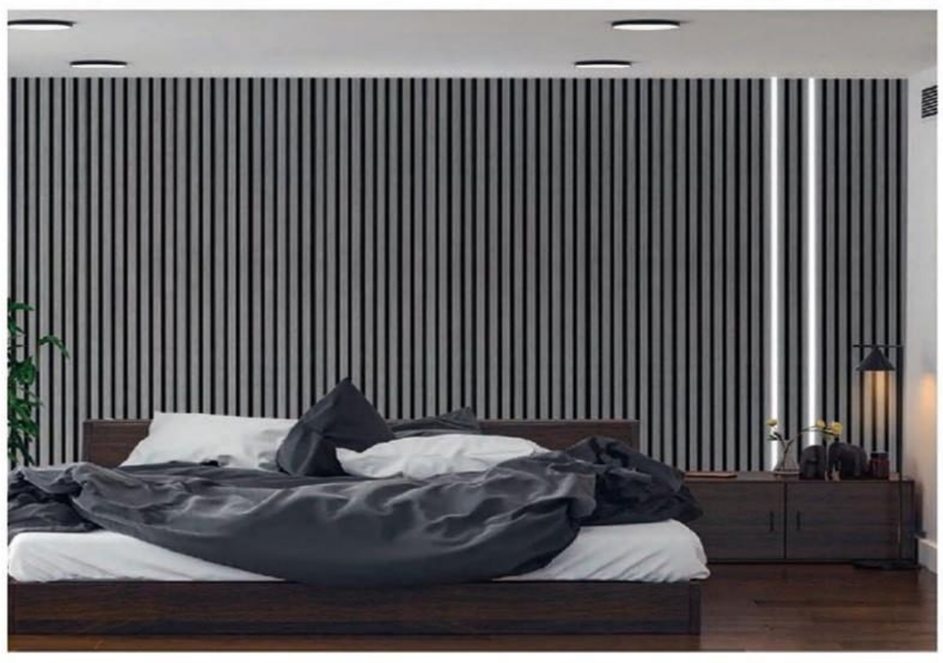






M1J01F01-MJ13(12x25mm)






HJ01F01-PC18(18x25mm)



Anti-scratch mirror

Silver mirror

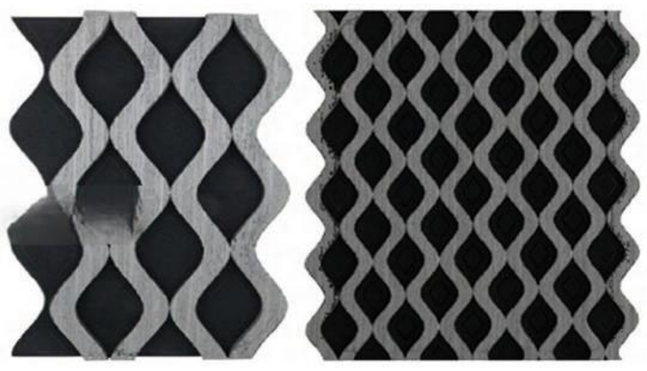

Water ripples

SPEEDING
QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD

PRODUCT DISPLAY

PU






PE





UV

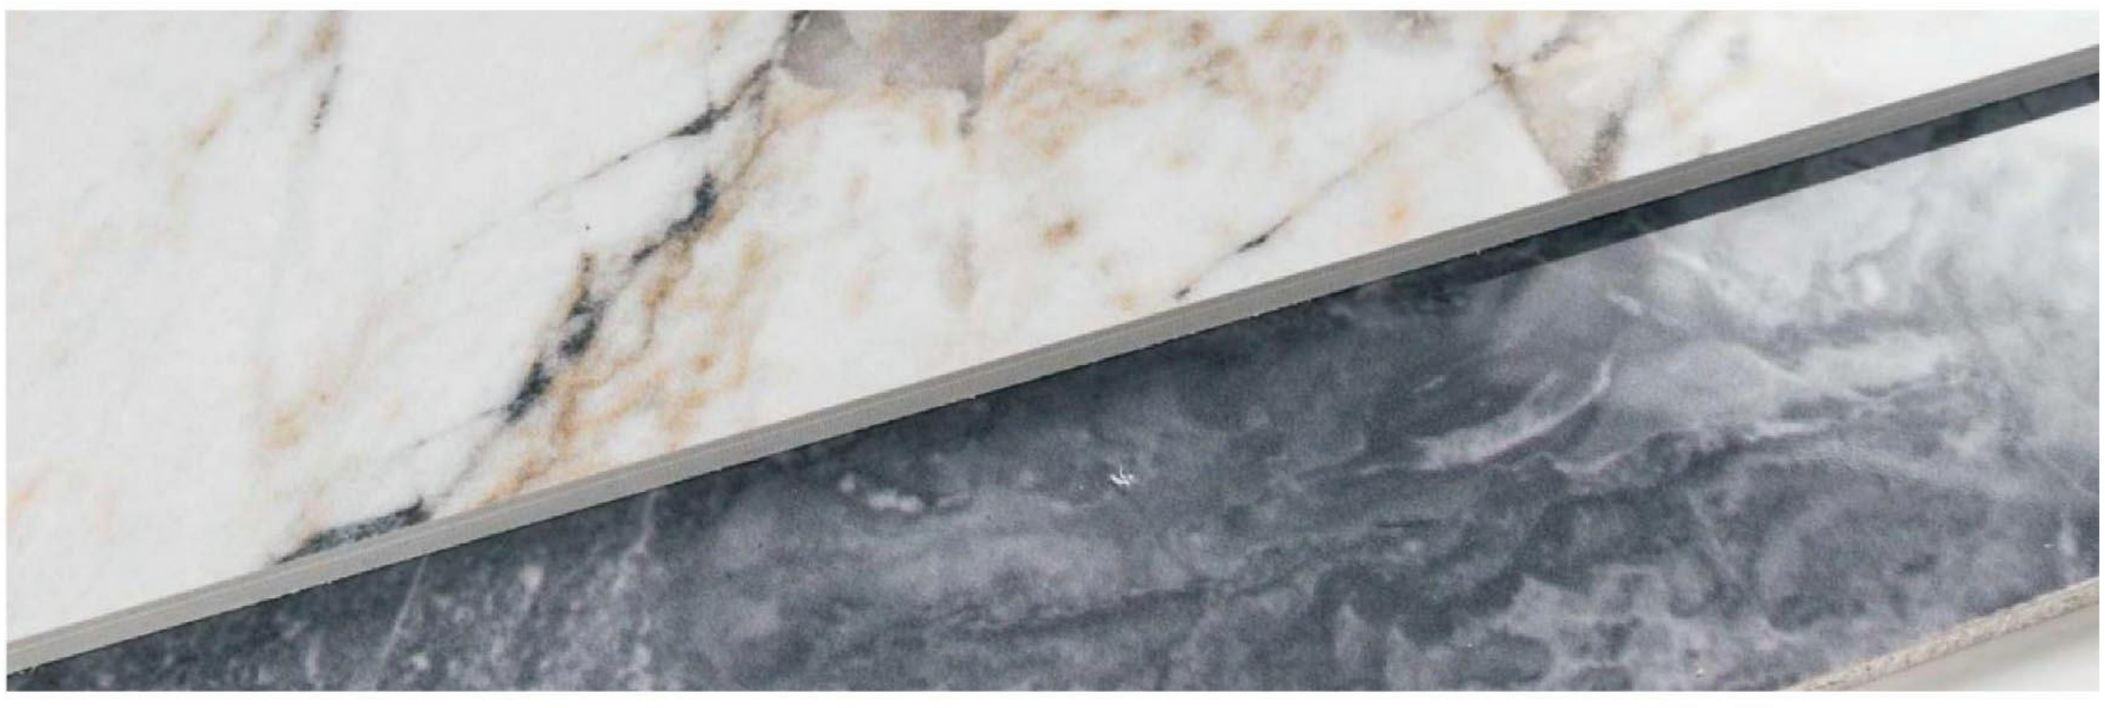





Product introduction	
Name:	UV background wall
Length and width:	Single piece size within 1200*2440 mm can be customized
Thickness:	3MM,2.8MM,2.5MM
Surface process:	bright or matte
Environmental protection grade:	E0
Fire rating:	B1

SPEEDING

QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD

PRODUCT DISPLAY

MDF






















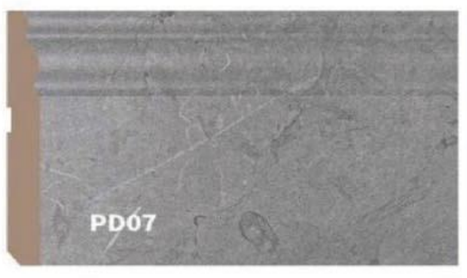





















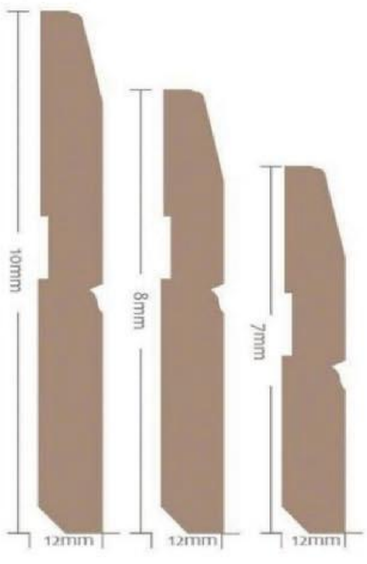

#M1J08A03



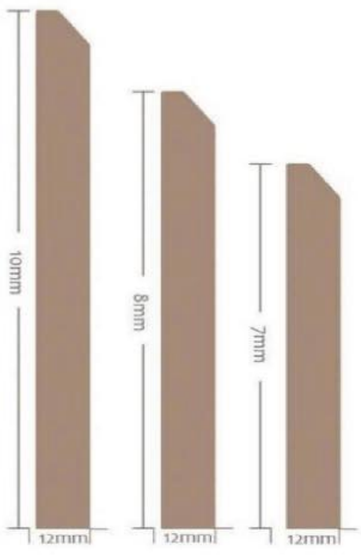

#M1J08A07








Product details

SPC Fifeproof and flame retardant

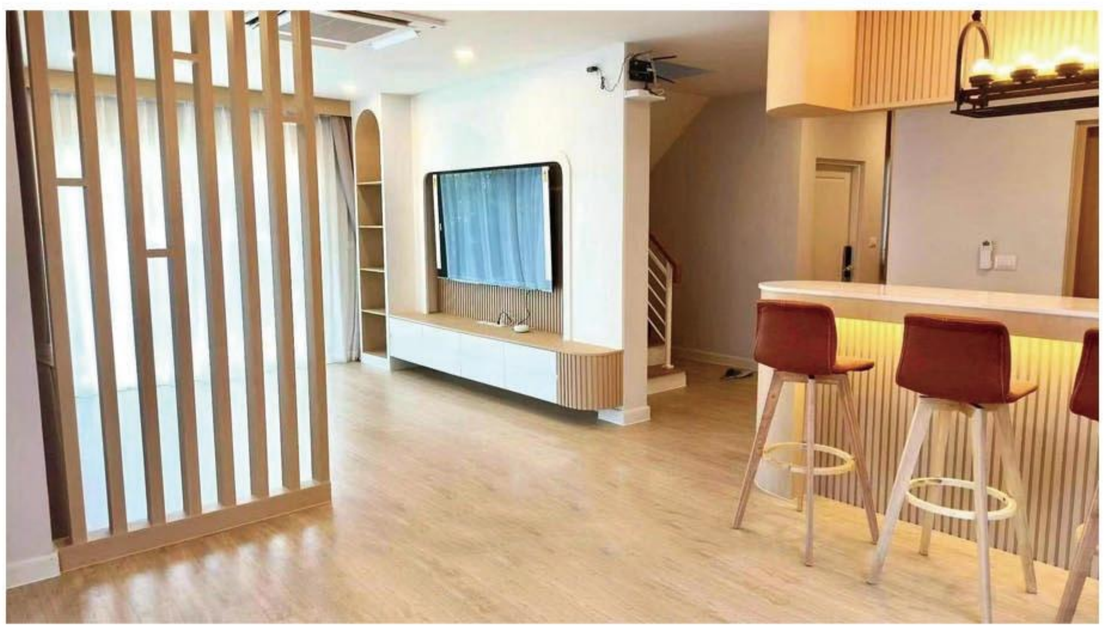



Witerproof and dampproof seamless tiling



No adhesive backing

SPEEDING

QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD

WALL BOARD



Figure 1



Figure 2



Figure 3



Figure 4



Figure 5

CUSTOMIZED SYSTEM | Size can be customized



Connect with U-shaped slots



Close-fitting connection



Seamless connection with locking buckles



Connection with double female grooves and concealed strip profiles




Connection with double female grooves and "Tu" shaped lines




Connection with double female grooves and same-color internal I-beam profiles


Base material installation

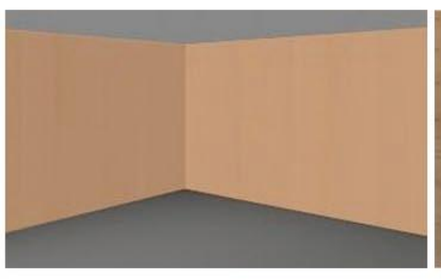


1.The base layer board is laid flat, and the wall is leveled.

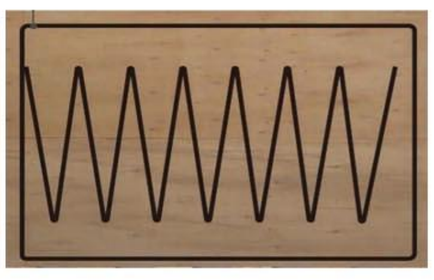

2.Apply neutral high-temperature -resistant structural adhesive on the back of the wall panel.

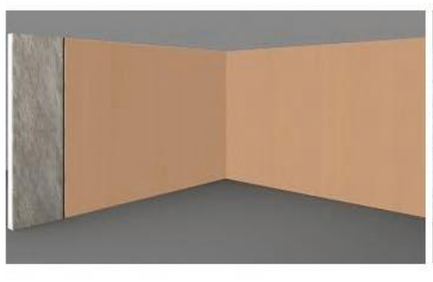

3.Install the wall panel. (After the wall panel is installed, press the wall panel to make the adhesive between the wall panel and the wall bond more firmly.)

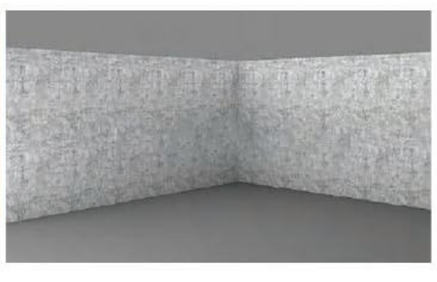

4.Installation is completed.



J-3-5



J-1-5




J-2-5



J-4-5




J-5

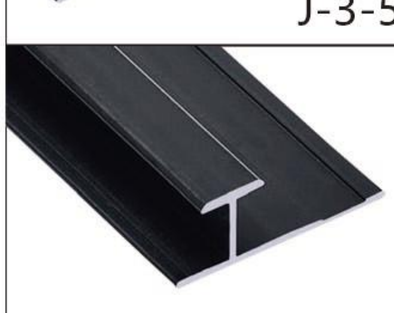

J-6-8



J-7-8

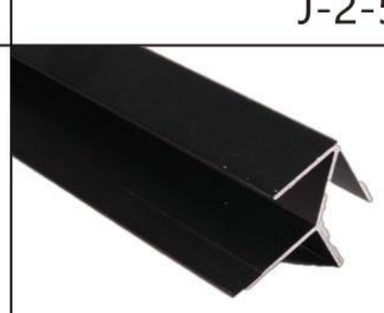

J-8-8



J-9-8



J-10-8



J-12-4



J-20




J-21




J-22




J-23




J-13



J-14



J-15





L25

SPEEDING

QINGDAO SPEEDING INTERNATIONAL TRADE CO.,LTD

E0 ENVIRONMENTAL PROTECTION LEVEL

Wpc environmental protection level B2

Flexible stone environmental protection level Acoustic panel environmental protection level A1

popular in Australia, Europe, Southeast Asia, the Middle East and other countries



Adhere to the industry´s high standards of material use

The good way of life is shown through the plate

装配未来 品味格调

Wpc Wall Panel/Bamboo Charcoal Wood Veneer Product Uses

Product use

- Hotel ren ovation
- Esports Intemet Cafe
- KTV
- Office
- Bar
- Engineering ren ovation

Product Description

Product Warranty

- Waterproof and moisture-proof
- Fire retardant and flame retardant
- Environmentally friendly and formaldehyde free