


POLIA MAGNÉTICA FERRITE SULMAG

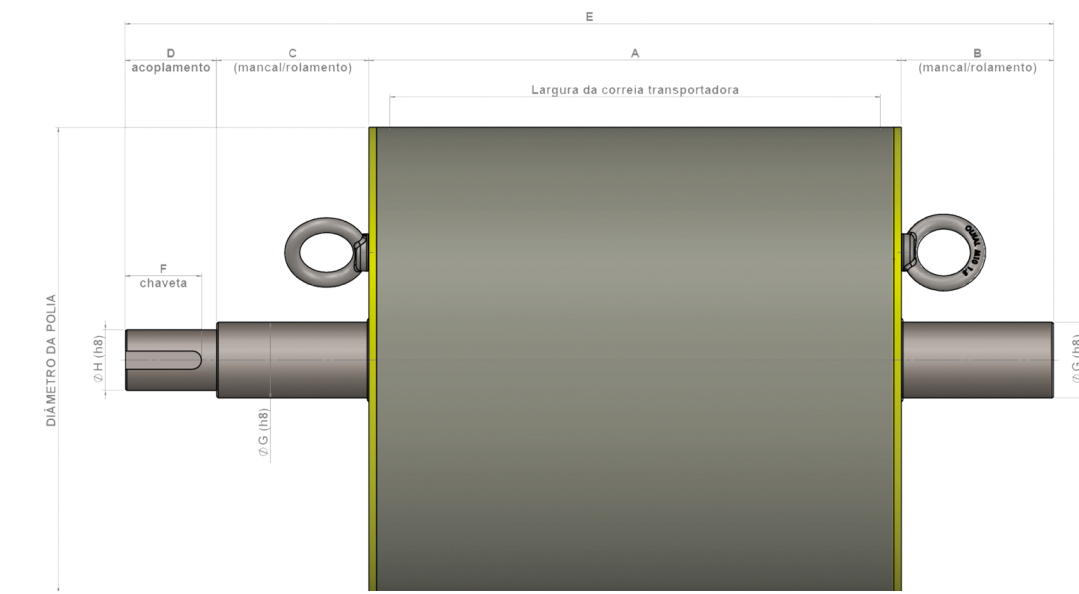

POLIA MAGNÉTICA																
DIÂMETRO ROTAÇÃO / VELOCIDADE RECOMENDADA	CÓDIGOS	Largura da correia (mm)	A (mm)	CAPACIDADE MÁX. (m³/h)	PESO APROXIMADO (Kg)	DIMENSÕES										
						B	C	D	E	F	G	H	Rasgo da chaveta			
220 55 RPM 0,6 m/s	PMF2235	250-350	380	16	45	de acordo com o projeto do cliente										
	PMF2240	350-400	430	22	60											
	PMF2250	400-500	530	34	78											
	PMF2260	500-600	630	50	90											
	PMF2270	600-700	730	75	105											
	PMF2280	700-800	830	95	120											
	PMF2290	800-900	930	105	138											
305 56 RPM 0,9 m/s	PMF3035	250-350	380	28	80											
	PMF3040	350-400	430	36	95											
	PMF3050	400-500	530	56	110											
	PMF3060	500-600	630	65	125											
	PMF3070	600-700	730	70	150											
	PMF3080	700-800	830	150	175											
	PMF3090	800-900	930	190	190											
	PMF30100	900-1000	1030	215	205											
	PMF30110	1000-1100	1130	325	225											
	PMF30125	1100-1250	1280	440	250											
381 51 RPM 1,0 M/S	PMF3840	300-400	430	44	115											
	PMF3850	400-500	530	70	150											
	PMF3860	500-600	630	90	185											
	PMF3870	600-700	730	120	220											
	PMF3880	700-800	830	179	255											
	PMF3890	800-900	930	220	290											
	PMF38100	900-1000	1030	290	325											
	PMF38110	1000-1100	1130	390	360											
	PMF38120	1100-1200	1230	520	395											

SULMAG®

Sul Magnéticos Equipamentos Industriais Ltda

Rua Corumbá, 88, Bairro Liberdade, CEP 93330-370

Novo Hamburgo | RS | Fone 51 3036 7800 | sulmag@sulmag.com.br

