

KUBOTA GENERATOR ENGINES


KUBOTA O5 SERIES - Diesel (13.1-20.2 HP)																			
Model	Emission Regulation	Cyl	Combust. System	Intake System	Stand-by				Continuous				Bore	Stroke	Displacement	Length	Width	Height	Dry Weight
					60 Hz 1800 RPM		50 Hz 1500 RPM		60 Hz 1800 RPM		50 Hz 1500 RPM								
					kW	HP	kW	HP	kW	HP	kW	HP							
					mm(in)		L(cu.in)		mm(in)			kg(lb)							
D1005-E3BG	Tier 4	3	IDI	NA	9.8	13.1	8.2	11.0	8.7	11.7	7.2	9.7	76.0 (2.99)	73.6 (2.90)	1.001 (61.08)	551.3 (21.70)	394.8 (15.54)	609.5 (24.00)	109.0 (240.3)
D1105-E3BG	Tier 4	3	IDI	NA	11.5	15.4	9.5	12.7	10.1	13.5	8.4	11.3	78.0 (3.07)	78.4 (3.09)	1.123 (68.53)	551.3 (21.70)	394.8 (15.54)	609.5 (24.00)	109.0 (240.3)
D1305-E3BG	Tier 4	3	IDI	NA	13.1	17.6	10.9	14.6	11.6	15.6	9.6	12.9	78.0 (3.07)	88.0 (3.46)	1.261 (76.95)	551.3 (21.70)	402.3 (15.85)	590.1 (23.25)	111.0 (244.7)
V1505-E3BG	Tier 4	4	IDI	NA	15.1	20.2	12.5	16.8	13.4	18.0	11.1	14.9	78.0 (3.07)	78.4 (3.09)	1.498 (91.41)	584.8 (23.02)	392.3 (15.44)	607.1 (23.90)	126.0 (277.8)

KUBOTA O3-M SERIES - Diesel (24.3-36.3 HP)																			
D1703-M-E3BG	Int. Tier 4	3	IDI	NA	18.1	24.3	15.0	20.1	15.1	20.2	12.8	17.2	87.0 (3.43)	92.4 (3.64)	1.647 (100.5)	605.6 (23.86)	505.0 (19.90)	642.8 (25.33)	168.0 (370.4)
V2003-M-E3BG	Int. Tier 4 Stage IIIA	4	IDI	NA	21.8	29.2	18.1	24.3	18.2	24.4	15.5	20.8	83.0 (3.27)	92.4 (3.64)	1.999 (122.0)	700.6 (27.60)	490.0 (19.31)	633.3 (24.95)	200.0 (440.9)
V2203-M-E3BG	Int. Tier 4 Stage IIIA	4	IDI	NA	24.2	32.5	20.1	27.0	20.2	27.1	17.2	23.1	87.0 (3.43)	92.4 (3.64)	2.197 (134.1)	700.6 (27.60)	490.0 (19.31)	633.3 (24.95)	200.0 (440.9)
V2403-M-E3BG	Int. Tier 4 Stage IIIA	4	IDI	NA	26.5	35.5	22.0	29.5	22.1	29.6	18.8	25.2	87.0 (3.43)	102.4 (4.03)	2.434 (148.5)	700.6 (27.60)	490.0 (19.31)	684.0 (26.95)	204.0 (449.7)
V2003-M-T-E3BG	Int. Tier 4 Stage IIIA	4	IDI	T	27.1	36.3	22.5	30.2	24.5	32.9	20.4	27.4	83 (3.27)	92.4 (3.64)	1.999 (122.0)	700.6 (27.60)	490.0 (19.31)	674.0 (26.56)	204.0 (449.7)



KUBOTA V3 SERIES - Diesel (41.6-70.8 HP)																			
V3300-E3BG	Int. Tier 4 Stage II	4	IDI	NA	31.0	41.6	25.4	34.1	28.1	37.7	23.0	30.8	98.0 (3.86)	110 (4.33)	3.318 (202.48)	769.2 (30.28)	527.1 (20.77)	769.5 (30.30)	281.0 (619.5)
V3600-T-E3BG	Int. Tier 4 Stage II	4	IDI	T	43.1	57.8	35.3	47.3	39.2	52.6	32.1	43.0	98.0 (3.86)	120.0 (4.72)	3.620 (220.9)	761.7 (30.01)	537.3 (21.17)	802.5 (31.62)	284.0 (626.1)
V3800DI-T-E3BG	Tier 3	4	DI	T	52.8	70.8	-	-	48	64.4	-	-	100.0 (3.94)	120.0 (4.72)	3.769 (230.0)	768.6 (30.28)	543.5 (21.41)	797.0 (31.40)	280.0 (617.3)

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
Dry Weight: According to Kubota's standard engine specifications.
Gross Intermittent: SAE J 1995
Net Intermittent: SAE J 1346
Net Continuous: SAE J 1346
Net output will vary by engine specifications.
Conversion Formula: HP = 0.7457 kW

HOW TO READ YOUR ENGINE MODEL

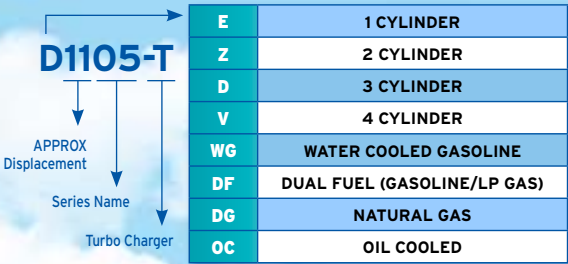

SELECT YOUR INDUSTRIAL OR GENERATOR ENGINE

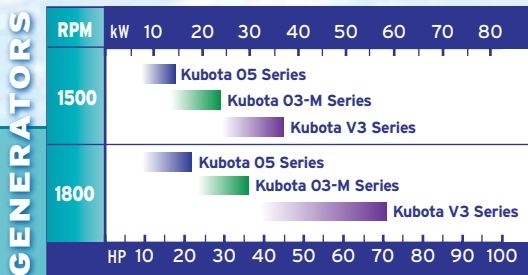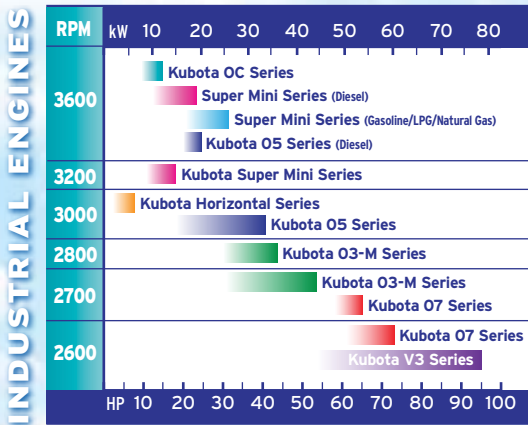

Kubota Engine America Corporation
505 Schelter Road, Lincolnshire, IL 60069
phone: 847-955-2500 fax: 847-955-2501
www.kubotaengine.com

Kubota Canada, Ltd.
5900 14th Avenue, Markham, Ontario L3S 4K4
phone: 905-294-7477 fax: 905-294-1554
www.kubota.ca

TOUGH
Kubota
STUFF

Peace of mind . . . always!

Kubota

**ENGINE
SELECTION
GUIDE**

KUBOTA INDUSTRIAL ENGINES

KUBOTA SUPER MINI SERIES - Diesel (12.5-23.5 HP)

Model	Emission Regulation	Cyl	Combust. System	Intake System	INDUSTRIAL USE						Bore	Stroke	Displacement	Speed	Length	Width	Height	Dry Weight
					Gross Intermittent		Net Intermittent		Net Continuous									
					kW	HP	kW	HP	kW	HP								
Z482-E3B	Tier 4	2	IDI	NA	9.9	13.3	9.3	12.5	8.1	10.9	67.0 (2.64)	68.0 (2.68)	0.479 (29.23)	3600	360.6 (14.20)	404.0 (15.91)	564.1 (22.21)	53.1 (117.1)
Z602-E3B	Tier 4	2	IDI	NA	10.8	14.5	10.1	13.5	8.8	11.8	72.0 (2.83)	73.6 (2.90)	0.599 (36.55)	3200	384.6 (15.14)	420.5 (16.60)	544.1 (21.42)	60.0 (132.3)
Z602-E3B	Tier 4	2	IDI	NA	12.5	16.8	11.6	15.6	10.1	13.5	72.0 (2.83)	73.6 (2.90)	0.599 (36.55)	3600	384.6 (15.14)	420.5 (16.60)	544.1 (21.42)	60.0 (132.3)
D722-E3B	Tier 4	3	IDI	NA	14.9	20.0	14.0	18.8	12.2	16.4	67.0 (2.64)	68.0 (2.68)	0.719 (43.88)	3600	435.1 (17.13)	404.0 (15.91)	564.1 (22.21)	63.0 (139.1)
D902-E3B	Tier 4	3	IDI	NA	16.1	21.6	15.4	20.7	13.4	18.0	72.0 (2.83)	73.6 (2.90)	0.898 (54.80)	3200	467.1 (18.40)	420.5 (16.60)	544.1 (21.42)	72.0 (158.8)
D902-E3B	Tier 4	3	IDI	NA	18.5	24.8	17.5	23.5	15.2	20.4	72.0 (2.83)	73.6 (2.90)	0.898 (54.80)	3600	467.1 (18.40)	420.5 (16.60)	544.1 (21.42)	72.0 (158.8)

KUBOTA SUPER MINI SERIES - Gasoline/LPG/Natural Gas (22.9-31 HP)

WG752-E2B*		Tier 2	3	IDI	NA	18.3	24.5	17.1	22.9	13.4	18.0	68.0 (2.68)	68.0 (2.68)	0.740 (45.2)	3600	421.0 (16.57)	392.0 (15.44)	540.0 (21.26)	61.7 (136.0)
WG972-E2B		Tier 2	3	IDI	NA	24.2	32.5	23.1	31.0	18.6	24.9	74.5 (2.93)	73.6 (2.90)	0.962 (58.7)	3600	442.6 (17.40)	402.0 (15.80)	503.1 (19.80)	72.0 (159.0)
DF752-E2B*	LPG	Tier 2	3	IDI	NA	17.5	23.5	16.4	22.0	12.7	17.0	68.0 (2.68)	68.0 (2.68)	0.740 (45.2)	3600	421.0 (16.57)	392.0 (15.44)	540.0 (21.26)	61.7 (136.0)
	GAS	Tier 2	3	IDI	NA	18.3	24.5	17.1	22.9	13.4	18.0	68.0 (2.68)	68.0 (2.68)	0.740 (45.2)	3600	421.0 (16.57)	392.0 (15.44)	540.0 (21.26)	61.7 (136.0)
DF972-E2B	LPG	Tier 2	3	IDI	NA	23.1	31.0	22.0	29.5	17.5	23.5	74.5 (2.93)	73.6 (2.90)	0.962 (58.7)	3600	442.6 (17.40)	402.0 (15.80)	503.1 (19.80)	72.0 (159.0)
	GAS	Tier 2	3	IDI	NA	24.2	32.5	23.1	31.0	18.9	25.3	74.5 (2.93)	73.6 (2.90)	0.962 (58.7)	3600	442.6 (17.40)	402.0 (15.80)	503.1 (19.80)	72.0 (159.0)
DG972-E2B** Natural GAS		Tier 2	3	IDI	NA	18.7	25.1	17.6	23.6	14.5	19.4	74.5 (2.93)	73.6 (2.90)	0.962 (58.7)	3600	452.5 (17.81)	415.4 (16.35)	502.5 (19.78)	95.4 (210.3)

*NO CALIFORNIA CERTIFICATE
**STATIONARY APPLICATIONS ARE EXEMPT IN CALIFORNIA

KUBOTA 05 SERIES - Diesel (22.5-42 HP)

Model	Emission Regulation	Cyl	Combust. System	Intake System	INDUSTRIAL USE						Bore	Stroke	Displacement	Speed	Length	Width	Height	Dry Weight
					Gross Intermittent		Net Intermittent		Net Continuous									
					kW	HP	kW	HP	kW	HP								
D1005-E3B	Tier 4	3	IDI	NA	17.5	23.5	16.8	22.5	14.6	19.6	76.0 (2.99)	73.6 (2.90)	1.001 (61.08)	3000	497.8 (19.60)	396.0 (15.59)	602.0 (23.70)	93.0 (205.0)
D1005-E3B	Tier 4	3	IDI	NA	18.5	24.8	17.5	23.5	15.2	20.4	76.0 (2.99)	73.6 (2.90)	1.001 (61.08)	3600	497.8 (19.60)	396.0 (15.59)	602.0 (23.70)	93.0 (205.0)
D1105-E3B	Tier 4	3	IDI	NA	18.5	24.8	17.8	23.9	15.5	20.8	78.0 (3.07)	78.4 (3.09)	1.123 (68.53)	3000	497.8 (19.60)	396.0 (15.59)	602.0 (23.70)	93.0 (205.0)
D1305-E3B	Int. Tier 4 Stage IIIA	3	IDI	NA	21.7	29.1	21.0	28.2	18.2	24.4	78.0 (3.07)	88.0 (3.46)	1.261 (76.95)	3000	497.6 (19.59)	396.0 (15.59)	590.1 (23.20)	95.0 (209.4)
D1105-T-E3B	Int. Tier 4 Stage IIIA	3	IDI	T	24.5	32.9	23.5	31.5	20.4	27.4	78.0 (3.07)	78.4 (3.09)	1.123 (68.53)	3000	497.8 (19.60)	433.0 (17.05)	626.0 (24.65)	97.0 (213.8)
V1505-E3B	Int. Tier 4 Stage IIIA	4	IDI	NA	26.2	35.1	25.0	33.5	21.7	29.1	78.0 (3.07)	78.4 (3.09)	1.498 (91.41)	3000	591.3 (23.28)	396.0 (15.59)	607.0 (23.90)	110.0 (242.5)
V1505-T-E3B	Int. Tier 4 Stage IIIA	4	IDI	T	33.0	44.3	31.3	42.0	27.2	36.5	78.0 (3.07)	78.4 (3.09)	1.498 (91.41)	3000	591.3 (23.28)	433.0 (17.05)	621.0 (24.45)	114.0 (251.3)

KUBOTA 03-M SERIES - Diesel (32.6-55.4 HP)

D1703-M-E3B	Int. Tier 4 Stage IIIA	3	IDI	NA	26.1	35.0	24.3	32.6	21.1	28.3	87.0 (3.43)	92.4 (3.64)	1.647 (100.5)	2800	572.1 (22.5)	499.0 (19.6)	643.0 (25.3)	148.0 (326.3)
D1803-M-E3B	Int. Tier 4 Stage IIIA	3	IDI	NA	27.9	37.4	26.5	35.5	23.0	30.8	87.0 (3.43)	102.4 (4.03)	1.826 (111.4)	2700	575.9 (22.7)	499.0 (19.6)	684.0 (26.9)	151.0 (332.9)
V2003-M-E3B	Int. Tier 4 Stage IIIA	4	IDI	NA	32.6	43.7	29.8	40.0	25.9	34.7	83.0 (3.27)	92.4 (3.64)	1.999 (122.0)	2800	667.1 (26.3)	499.0 (19.6)	633.5 (24.9)	180.0 (396.9)
V2203-M-E3B	Int. Tier 4 Stage IIIA	4	IDI	NA	35.9	48.1	33.0	44.3	28.7	38.5	87.0 (3.43)	92.4 (3.64)	2.197 (134.1)	2800	667.1 (26.3)	499.0 (19.6)	633.5 (24.9)	180.0 (396.9)
V2403-M-E3B	Int. Tier 4 Stage IIIA	4	IDI	NA	36.5	48.9	33.9	45.5	29.4	39.4	87.0 (3.43)	102.4 (4.03)	2.434 (148.5)	2700	670.9 (26.4)	499.0 (19.6)	684.0 (26.9)	184.0 (405.7)
V2403-M-DI-E3B	Int. Tier 4 Stage IIIA	4	DI	NA	36.5	48.9	35.0	46.9	30.4	40.8	87.0 (3.43)	102.4 (4.03)	2.434 (148.5)	2700	670.9 (26.4)	499.0 (19.6)	684.0 (26.9)	184.0 (405.7)
V2403-M-T-E3B	Int. Tier 4 Stage IIIA	4	IDI	T	44.0	59.0	41.3	55.4	35.8	48.0	87.0 (3.43)	102.4 (4.03)	2.434 (148.5)	2700	670.9 (26.4)	499.0 (19.6)	724.6 (28.5)	188.0 (414.5)

KUBOTA 07 SERIES - Diesel (63.7-72 HP)

Model	Emission Regulation	Cyl	Combust. System	Intake System	INDUSTRIAL USE						Bore	Stroke	Displacement	Speed	Length	Width	Height	Dry Weight
					Gross Intermittent		Net Intermittent		Net Continuous									
					kW	HP	kW	HP	kW	HP								
											mm(in)	L(cu.in)	rpm	mm(in)		kg(lb)		
V2607-DI-T-E3B	Int. Tier 4 Stage IIIA	4	DI	T	49.2	66.0	47.5	63.7	41.2	55.3	87.0 (3.43)	110.0 (4.33)	2.615 (159.6)	2700	650.0 (25.59)	475.0 (18.70)	680.0 (26.77)	235.0 (518.1)
V3307-DI-T-E3B	Int. Tier 4 Stage IIIA	4	DI	T	55.4	74.3	53.7	72.0	46.6	62.5	94.0 (3.70)	120.0 (4.72)	3.331 (203.3)	2600	674.0 (26.54)	506.0 (19.92)	739.0 (29.09)	268.0 (590.8)

KUBOTA V3 SERIES - Diesel (61.3-95.7)

V3600-E3B	Int. Tier 4 Stage IIIA	4	IDI	NA	49.8	66.8	45.7	61.3	39.7	53.2	98.0 (3.86)	120.0 (4.72)	3.620 (220.9)	2600	745.0 (29.33)	536.0 (21.10)	741.5 (29.19)	264.0 (582.0)
V3600-T-E3B	Tier 3 Stage IIIA	4	IDI	T	63.0	84.5	58.7	78.7	51.0	68.4	98.0 (3.86)	120.0 (4.72)	3.620 (220.9)	2600	745.0 (29.33)	538.5 (21.20)	794.0 (31.26)	275.0 (606.3)
V3800DI-T-E3B	Tier 3 Stage IIIA	4	DI	T	74.0	99.2	71.4	95.7	62.0	83.1	100.0 (3.94)	120.0 (4.72)	3.769 (230.0)	2600	745.0 (29.33)	549.0 (21.61)	794.0 (31.26)	288.0 (634.9)

KUBOTA HORIZONTAL - Diesel (7 HP)

EA330-E3	Tier 4	1	IDI	NA	5.9	7.9	5.2	7.0	-	-	77.0 (3.03)	70.0 (2.76)	0.325 (19.83)	3000	566.0 (22.28)	411.0 (16.18)	457.0 (17.99)	54.0 (119.0)
----------	--------	---	-----	----	-----	-----	-----	-----	---	---	-------------	-------------	---------------	------	---------------	---------------	---------------	--------------

KUBOTA OIL AIR-COOLED - Diesel (6-9.4 HP)

OC60-E3	Tier 4	1	IDI	NA	-	-	4.5	6.0	-	-	72.0 (2.83)	68.0 (2.68)	0.276 (16.84)	3600	461.0 (18.15)	403.0 (15.87)	458.0 (18.03)	38.0 (84.0)
OC95-E3	Tier 4	1	IDI	NA	-	-	7.0	9.4	-	-	83.0 (3.27)	77.0 (3.03)	0.416 (25.39)	3600	503.0 (19.80)	452.0 (17.80)	501.0 (19.72)	56.0 (123.0)