



KD 425/2 25 LD 425/2

QUICK SPECIFICS

2
CYLINDER

19.0 | **14.0** @ 3600 rpm
HP kW


42.0 @ 2200 rpm
Nm

[Power & torque N curve - 80/1269/CE E-ISO 1585]




DATA

DIMENSIONS (mm)

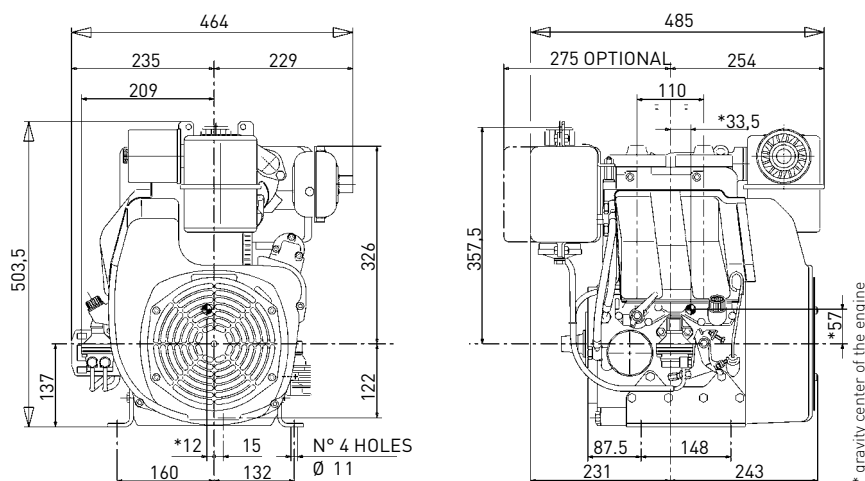

PERFORMANCE CURVES (IFN- ISO 3046 AND ISO 14396)

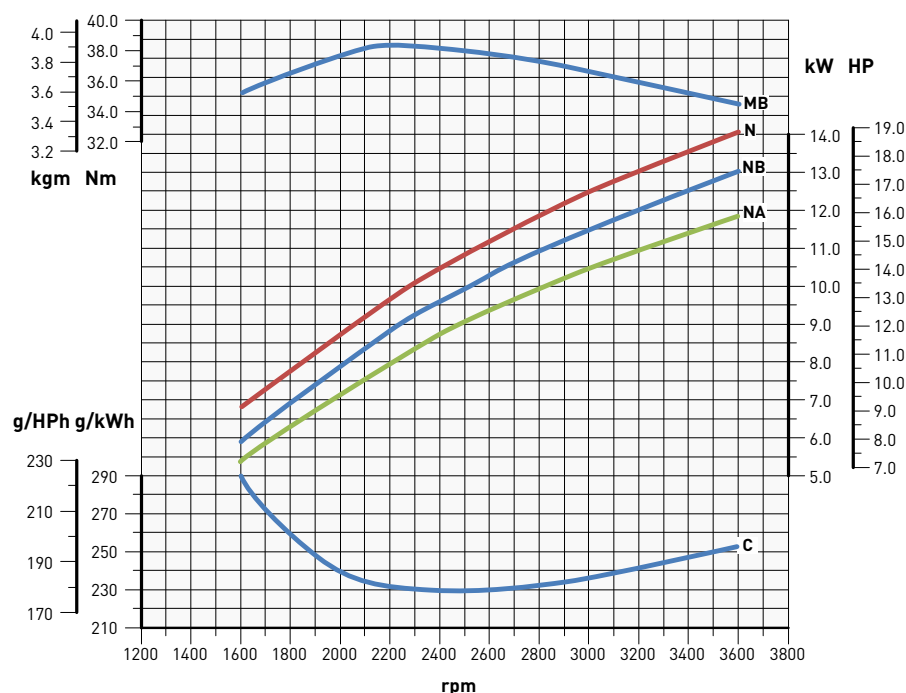

N - Power curve - 80/1269/CE E-ISO 1585

NB - Power curve - ISO 3046/1 - IFN

NA - Power curve - ISO 3046/1 - ICXN

MB - Torque curve - [NB curve]

C - Specific fuel consumption - [NB curve]

Power ratings refer to engines equiped with air filter, standard muffler, after being run in and in ambient conditions of 25°C and 1 bar. Power levels drop by 1% every 100m altitude and by 2% every 5°C above 25°C.