



KDW 1404 LDW 1404

QUICK SPECIFICS


4
CYLINDERS

34.8 | **26** @ 3600 rpm
HP kW

84 @ 2000 rpm
Nm

DATA


DIMENSIONS (mm)

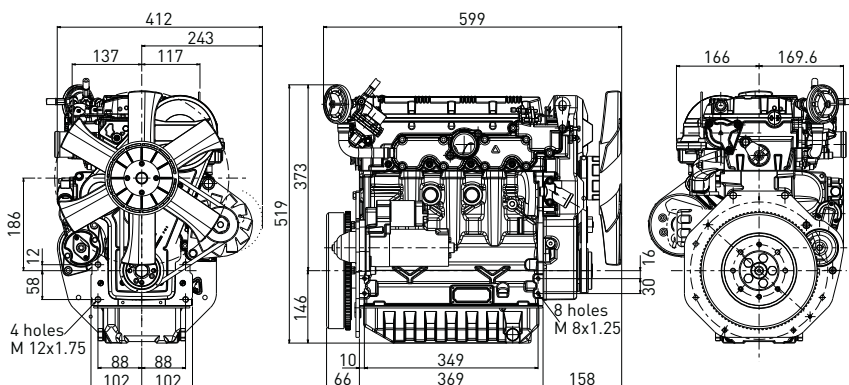

(Power & torque N curve - 80/1269/CE E-ISO 1585)



PERFORMANCE CURVES (IFN- ISO 3046 AND ISO 14396)

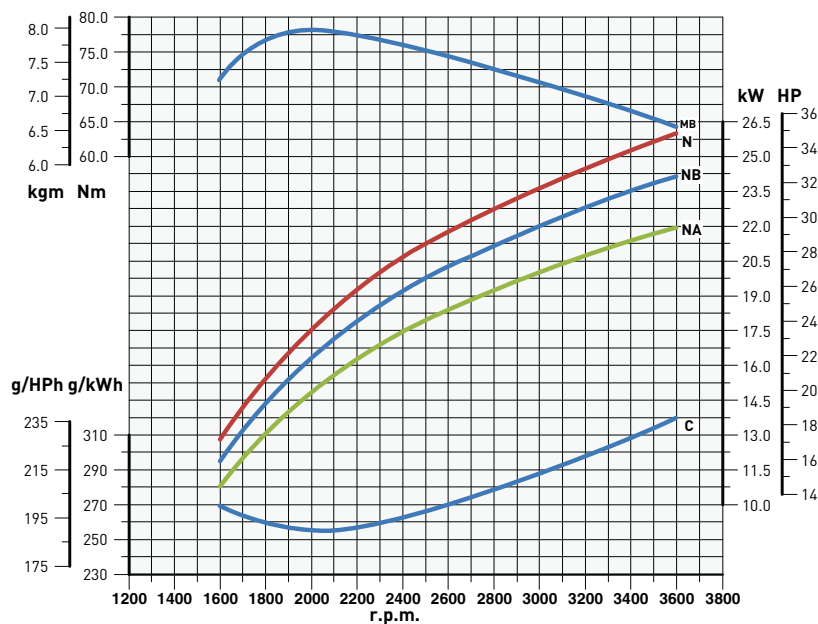

N - Power curve - 80/1269/CE E-ISO 1585
NB - Power curve - ISO 3046/1 - IFN
NA - Power curve - ISO 3046/1 - ICXN
MB - Torque curve - (NB curve)
C - Specific fuel consumption - (NB curve)

Power ratings refer to engines equipped with air filter, standard muffler, after running-in period at ambient conditions of +25°C, relative humidity 30% and 1 bar. Power levels drop by 1% every 100 m altitude and by 2% every 5°C above +25°C.

OTHER AVAILABLE SETTINGS

Power max. NB* (kW)	Torque max. (Nm)
21.8 @ 3000 rpm	77.5 @ 1900 rpm
18 @ 2500 rpm	76 @ 1600 rpm